

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 342 899 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
10.09.2003 Bulletin 2003/37

(51) Int Cl.7: **F02D 41/04, F02D 45/00,
F02P 5/15**

(21) Application number: **01270229.6**

(86) International application number:
PCT/JP01/10917

(22) Date of filing: **12.12.2001**

(87) International publication number:
WO 02/048531 (20.06.2002 Gazette 2002/25)

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **12.12.2000 JP 2000377960**

(71) Applicant: **TOYOTA JIDOSHA KABUSHIKI
KAISHA**
Toyota-shi, Aichi 471-8571 (JP)

(72) Inventors:
• **FUWA, Naohide,**
Toyota Jidosha Kabushiki Kaisha
Toyota-shi, Aichi 471-8571 (JP)
• **KANAMARU, Masanobu,** Toyota Jidosha KK
Toyota-shi, Aichi 471-8571 (JP)


- **KONISHI, Masaaki,** Toyota Jidosha KK
Toyota-shi, Aichi 471-8571 (JP)
- **OSANAI, Akinori,** Toyota Jidosha KK
Toyota-shi, Aichi 471-8571 (JP)
- **WATANABE, Satoru,** Toyota Jidosha KK
Toyota-shi, Aichi 471-8571 (JP)
- **EHARA, Masato,** Toyota Jidosha KK
Toyota-shi, Aichi 471-8571 (JP)

(74) Representative:
Leson, Thomas Johannes Alois, Dipl.-Ing.
Patentanwälte
Tiedtke-Bühling-Kinne & Partner,
Bavariaring 4
80336 München (DE)

(54) **CONTROLLER OF INTERNAL COMBUSTION ENGINE**

(57) A device for controlling an internal combustion engine, comprising a variable valve mechanism for varying opening areas (valve lift) or the working angles (valve-opening periods) of at least either the intake valves or the exhaust valves, wherein a pressure in the cylinder is calculated based on the opening area or the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the pressure in the cylinder. Upon calculating the pressure in the cylinder based on the opening areas or the working angles of the intake and exhaust valves, it is possible to more suitably control the internal combustion engine based not only upon the peak combustion pressure in the cylinder like when a combustion pressure sensor is used but also upon a pressure in the cylinder at a moment other than the peak combustion pressure.

Fig.1

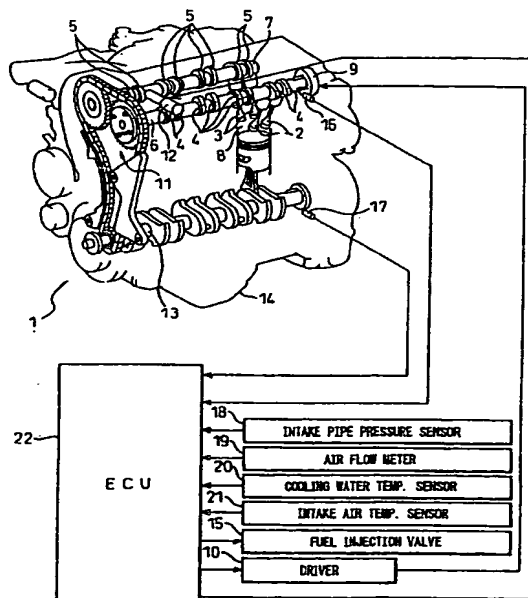

EP 1 342 899 A1

Description

Technical Field:

[0001] The present invention relates to a device for controlling internal combustion engines.

Background Art:

[0002] There have heretofore been known devices for controlling internal combustion engines based upon the pressure in the cylinders. Japanese Unexamined Patent Publication (Kokai) No. 9-53503 discloses a device of this kind for controlling internal combustion engines. In the device for controlling internal combustion engines disclosed in the above Japanese Unexamined Patent Publication (Kokai) No. 9-53503, the amount of fuel injection and the ignition timing are calculated based on an output value of a cylinder pressure sensor that detects the pressure in the cylinder.

[0003] When the pressure in the cylinder is detected by the cylinder pressure sensor as in the device for controlling internal combustion engines disclosed in Japanese Unexamined Patent Publication (Kokai) No. 9-53503, however, the pressure in the cylinder that is detected is a peak combustion pressure at a moment of a crank angle of 10 to 15 degrees after the top dead center in the compression stroke. With the device for controlling internal combustion engines disclosed in Japanese Unexamined Patent Publication (Kokai) No. 9-53503, therefore, it is not possible to control the internal combustion engines based on the pressure in the cylinder other than the peak combustion pressure in the cylinder, such as the pressure at the top dead center in the compression stroke. In addition, with the device for controlling internal combustion engines, which does not consider a change in the pressure in the cylinder accompanying a change in the opening areas of the intake and exhaust valves or a change in the working angle as a result of employing a variable valve mechanism as taught in Japanese Unexamined Patent Publication (Kokai) No. 9-53503, it is not possible to suitably control the internal combustion engine when the opening areas of the intake and exhaust valves vary or when the working angles thereof vary.

[0004] There has further been known a device for controlling internal combustion engines based on the temperature of a certain portion in the cylinder. The device for controlling internal combustion engines of this type has been disclosed in, for example, Japanese Unexamined Patent Publication (Kokai) No. 4-81574. In the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 4-81574, the ignition timing is calculated based upon an output value of a wall temperature sensor that detects the temperature of the cylinder wall, and the internal combustion engine is controlled based on the thus calculated ignition timing.

[0005] In the device for controlling internal combustion engines taught in the above Japanese Unexamined Patent Publication (Kokai) No. 4-81574, the ignition timing is calculated based on the temperature of the cylinder wall, and the internal combustion engine is controlled based on the ignition timing. However, there is a considerable difference between the temperature of the cylinder wall and the temperature of gas in the cylinder. In addition, it can be said that a suitable ignition timing is determined based on the temperature of gas in the cylinder rather than the temperature of the cylinder wall. Therefore, the internal combustion engine cannot be suitably controlled by the device for controlling internal combustion engines, which calculates the ignition timing based on the temperature of the cylinder wall as taught in Japanese Unexamined Patent Publication (Kokai) No. 4-81574. Moreover, with the device for controlling internal combustion engines, which does not consider a change in the temperature of gas in the cylinder accompanying a change in the opening areas of the intake and exhaust valves or a change in the working angles thereof as a result of employing a variable valve mechanism taught in Japanese Unexamined Patent Publication (Kokai) No. 4-81574, it is not possible to suitably control the internal combustion engine when the opening areas of the intake and exhaust valves vary or when the working angles thereof vary. There has further been known a device for controlling internal combustion engines based upon the ratio or amount of an internal EGR gas by being provided with a variable valve mechanism for at least the intake valves or the exhaust valves. As a device for controlling internal combustion engines of this kind, there has been known the one disclosed in, for example, Japanese Unexamined Patent Publication (Kokai) No. 9-209895. The device for controlling internal combustion engines disclosed in Japanese Unexamined Patent Publication (Kokai) No. 9-209895 is equipped with a variable valve mechanism for shifting the opening/closing timing (valve timing) without varying the length of period for opening the intake valve, and calculates the ignition timing based on the sum of the amount of the internal EGR gas (recirculating amount of the internal exhaust gas) or the amount of the burnt gas taken into the cylinder again after blown back into the intake pipe and the amount of the burnt gas remaining in the cylinder, i.e. not exhausted from the cylinder, thereby to control the internal combustion engine based on the thus calculated ignition timing.

[0006] However, the device for controlling internal combustion engines disclosed in Japanese Unexamined Patent Publication (Kokai) No. 9-209895 is not considering the amount of varying the opening areas of the intake and exhaust valves, though it is considering the amount of shifting the opening/closing timing of the intake and exhaust valves at the time of calculating the amount of the internal EGR gas. When the variable valve mechanism is provided with a function for varying the valve-lifting amount and when the opening areas of

the intake and exhaust valves are varied by changing the valve-lifting amount, the real amount of the internal EGR gas varies to a considerable degree even though the opening/closing timings of the intake and exhaust valves are not shifted. When the amount of the internal EGR gas is calculated by the device for controlling internal combustion engines disclosed in Japanese Unexamined Patent Publication (Kokai) No. 9-209895 without considering a change in the opening areas of the intake and exhaust valves despite the opening areas of the intake and exhaust valves are changing, therefore, the calculated amount of the internal EGR gas becomes considerably different from the real amount of the internal EGR gas. Namely, when the opening areas of the intake and exhaust valves are subject to change, the amount of the internal EGR gas is not correctly calculated by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 9-209895, which considers a change in the amount of the internal EGR gas accompanying a change in the opening areas of the intake and exhaust valves due, for example, to the variable valve mechanism. Accordingly, it is not possible to suitably control the internal combustion engines.

[0007] Further, the device for controlling the internal combustion engines disclosed in Japanese Unexamined Patent Publication (Kokai) No. 9-209895 considers the amount of shifting the opening/closing timings of the intake and exhaust valves at the time of calculating the amount of the internal EGR gas but does not consider the amount of changing the rotational angle of the cam shafts that correspond to the periods of opening the intake and exhaust valves. On the other hand, when the variable valve mechanism is provided with a function for varying the working angles of the intake and exhaust valves, i.e., with a function for increasing or decreasing the periods for opening the intake and exhaust valves and when the working angles of the intake and exhaust valves are varied, the real amount of the internal EGR gas changes to a considerable degree even when the opening/closing timings of the intake and exhaust valves are not shifted, i.e., even when the peak timing of the valve-lifting amount is not changed. When the amount of the internal EGR gas is calculated by the device for controlling internal combustion engines disclosed in Japanese Unexamined Patent Publication (Kokai) No. 9-209895 without considering a change in the working angles of the intake and exhaust valves though the working angles of the intake and exhaust valves are changing, therefore, the calculated amount of the internal EGR gas becomes considerably different from the real amount of the internal EGR gas. Namely, when the working angles of the intake and exhaust valves are subject to change, the amount of the internal EGR gas is not correctly calculated by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 9-209895, which does not consider a change in the

amount of the internal EGR gas accompanying a change in the working angles of the intake and exhaust valves due, for example, to the variable valve mechanism. Accordingly, it is not possible to suitably control the internal combustion engines.

[0008] There has further been known a device for controlling internal combustion engines equipped with a variable valve mechanism for at least either the intake valves or the exhaust valves, based on a degree of turbulence in the cylinder that is estimated relying upon the opening area of the intake valve varied by the variable valve mechanism. A device for controlling internal combustion engines of this type has been disclosed in, for example, Japanese Unexamined Patent Publication (Kokai) No. 2000-73800. In the device for controlling internal combustion engines disclosed in Japanese Unexamined Patent Publication (Kokai) No. 2000-73800, it is estimated that the degree of turbulence in the cylinder decreases with a decrease in the opening area of the intake valve that is varied by the variable valve mechanism.

[0009] Namely, in the device for controlling internal combustion engines disclosed in Japanese Unexamined Patent Publication (Kokai) No. 2000-73800, it is estimated that the degree of turbulence in the cylinder decreases with a decrease in the opening area of the intake valve that is varied by the variable valve mechanism. In practice, however, the degree of turbulence in the cylinder increases with a decrease in the opening area of the intake valve that is varied by the variable valve mechanism. Therefore, if it is estimated that the degree of turbulence in the cylinder decreases with a decrease in the opening area of the intake valve like in the device for controlling internal combustion engines as disclosed in Japanese Unexamined Patent Publication (Kokai) No. 2000-73800 and if the internal combustion engine is controlled based on the estimated degree of turbulence in the cylinder, then, the internal combustion engine is not suitably controlled when the opening area of the intake valve is varied by the variable valve mechanism.

Disclosure of the Invention:

[0010] In view of the above problems, it is an object of the present invention to provide a device for controlling an internal combustion engine based not only upon a peak combustion pressure in the cylinder but also upon a pressure in the cylinder at a moment other than the peak combustion pressure, thereby to suitably control the internal combustion engine even when the opening areas or the working angles of the intake and exhaust valves are varied.

[0011] It is another object of the present invention to provide a device for more suitably controlling an internal combustion engine than when the internal combustion engine is controlled based on the temperature of the cylinder wall even when the opening areas or the working

angles of the intake and exhaust valves are varied.

[0012] It is a further object of the present invention to provide a device for suitably controlling an internal combustion engine by correctly calculating an amount of the internal EGR gas even when the opening areas or the working angles of the intake and exhaust valves are varied.

[0013] It is a further object of the present invention to provide a device for suitably controlling an internal combustion engine by correctly estimating a degree of turbulence in the cylinder even when the opening areas or the working angles of the intake and exhaust valves are varied by the variable valve mechanism.

[0014] According to a first aspect of the present invention, there is provided a device for controlling an internal combustion engine based on a pressure in the cylinder, comprising a variable valve mechanism for varying opening areas of at least either the intake valves or the exhaust valves, wherein a pressure in the cylinder is calculated based on the opening area of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the pressure in the cylinder.

[0015] Namely, in the device for controlling an internal combustion engine according to the first aspect of the invention, a pressure in the cylinder is calculated based on the opening area of at least either the intake valve or the exhaust valve varied by the variable valve mechanism. It is therefore possible to control the internal combustion engine based not only upon a peak combustion pressure in the cylinder but also upon a pressure in the cylinder at a moment other than the peak combustion pressure, unlike the case of detecting the pressure in the cylinder by the cylinder pressure sensor employed by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 9-53503. Further, since the internal combustion engine is controlled based on the pressure in the cylinder calculated relying upon the opening areas of at least either the intake valves or the exhaust valves, it is possible to suitably control the internal combustion engine even when the opening areas of the intake and exhaust valves are varied. More specifically, the pressure in the cylinder increases with an increase in the opening area of the intake valve, the pressure in the cylinder being calculated based on the opening area of the intake valve, and the internal combustion engine is so controlled that the ignition timing is delayed with an increase in the pressure in the cylinder. Alternatively, the pressure in the cylinder increases with an increase in the opening area of the intake valve, the pressure in the cylinder being calculated based on the opening area of the intake valve, and the internal combustion engine is so controlled that the amount of fuel injection is increased with an increase in the pressure in the cylinder.

[0016] According to a second aspect of the present invention, there is provided a device for controlling an internal combustion engine based on a pressure in the

cylinder, comprising a variable valve mechanism for varying working angles of at least either the intake valves or the exhaust valves, wherein a pressure in the cylinder is calculated based on the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the pressure in the cylinder.

[0017] Namely, in the device for controlling an internal combustion engine according to the second aspect of the invention, a pressure in the cylinder is calculated based on the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism. It is therefore possible to control the internal combustion engine based not only upon a peak combustion pressure in the cylinder but also upon a pressure in the cylinder at a moment other than the peak combustion pressure, unlike the case of detecting the pressure in the cylinder by the cylinder pressure sensor employed by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 9-53503. Further, since the internal combustion engine is controlled based on the pressure in the cylinder calculated relying upon the working angles of at least either the intake valves or the exhaust valves, it is possible to suitably control the internal combustion engine even when the working angles of the intake and exhaust valves are varied. More specifically, when the intake valve is fully closed after the bottom dead center in the intake stroke, the pressure in the cylinder increases with a decrease in the working angle of the intake valve, the pressure in the cylinder being calculated based on the working angle of the intake valve, and the internal combustion engine is so controlled that the ignition timing is delayed with an increase in the pressure in the cylinder. Further, when the intake valve is fully closed before the bottom dead center in the intake stroke, the pressure in the cylinder increases with an increase in the working angle of the intake valve, the pressure in the cylinder being calculated based on the working angle of the intake valve, and the internal combustion engine is so controlled that the ignition timing is delayed with an increase in the pressure in the cylinder. Alternatively, the pressure in the cylinder increases with a decrease in the working angle of the intake valve, the pressure in the cylinder being calculated based on the working angle of the intake valve, and the internal combustion engine is so controlled that the amount of fuel injection is increased with an increase in the pressure in the cylinder.

[0018] According to a third aspect of the present invention, there is provided a device for controlling an internal combustion engine, comprising a variable valve mechanism for varying opening areas and working angles of at least either the intake valves or the exhaust valves, wherein a pressure in the cylinder is calculated based on the opening area and the working angle of at least either the intake valve or the exhaust valve varied

by the variable valve mechanism, and the internal combustion engine is controlled based on the pressure in the cylinder.

[0019] Namely, in the device for controlling an internal combustion engine according to the third aspect of the invention, a pressure in the cylinder is calculated based on the opening area and the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based upon the pressure in the cylinder. It is therefore possible to suitably control the internal combustion engine by more correctly calculating the pressure in the cylinder than a case of calculating the pressure in the cylinder based upon the opening areas only of the intake and exhaust valves but not upon the working angles of the intake and exhaust valves, or than a case of calculating the pressure in the cylinder based upon the working angles only of the intake and exhaust valves but not upon the opening areas of the intake and exhaust valves.

[0020] According to a fourth aspect of the present invention, there is provided a device for controlling an internal combustion engine based on a temperature of a certain portion in the cylinder, comprising a variable valve mechanism for varying opening areas of at least either the intake valves or the exhaust valves, wherein a temperature of gas in the cylinder is calculated based on the opening area of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the temperature of gas in the cylinder.

[0021] In the device for controlling an internal combustion engine according to the fourth aspect of the invention, a temperature of gas in the cylinder is calculated based on the opening area of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based upon the temperature of gas in the cylinder. It is therefore possible to more suitably control the internal combustion engine than when the internal combustion engine is controlled based on the temperature of the cylinder wall that is done by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 4-81574. Further, since the internal combustion engine is controlled based on the temperature of gas in the cylinder calculated relying upon the opening area of at least either the intake valves or the exhaust valves, it is possible to suitably control the internal combustion engine even when the opening areas of the intake and exhaust valves are varied. More specifically, the temperature of gas in the cylinder increases with an increase in the opening area of the intake valve, the temperature of gas in the cylinder being calculated based on the opening area of the intake valve, and the internal combustion engine is so controlled that the ignition timing is delayed with an increase in the temperature of gas in the cylinder.

[0022] According to a fifth aspect of the present invention, there is provided a device for controlling an internal combustion engine based on a temperature of a certain portion in the cylinder, comprising a variable valve mechanism for varying working angles of at least either the intake valves or the exhaust valves, wherein a temperature of gas in the cylinder is calculated based on the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the temperature of gas in the cylinder.

[0023] In the device for controlling an internal combustion engine according to the fifth aspect of the invention, the temperature of gas in the cylinder is calculated based on the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based upon the temperature of gas in the cylinder. It is therefore possible to suitably control the internal combustion engine better than when the internal combustion engine is controlled based on the temperature of the cylinder wall, as done by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 4-81574. Further, since the internal combustion engine is controlled based on the temperature of gas in the cylinder calculated relying upon the working angles of at least either the intake valves or the exhaust valves, it is possible to suitably control the internal combustion engine even when the working angles of the intake and exhaust valves are varied. More specifically, when the intake valve is fully closed after the bottom dead center in the intake stroke, the temperature of gas in the cylinder increases with an increase in the working angle of the intake valve, the temperature of gas in the cylinder being calculated based on the working angle of the intake valve, and the internal combustion engine is so controlled that the ignition timing is delayed with an increase in the temperature of gas in the cylinder. Further, when the intake valve is fully closed before the bottom dead center in the intake stroke, the temperature of gas in the cylinder increases with a decrease in the working angle of the intake valve, the temperature of gas in the cylinder being calculated based on the working angle of the intake valve, and the internal combustion engine is so controlled that the ignition timing is delayed with an increase in the temperature of gas in the cylinder.

[0024] According to a sixth aspect of the present invention, there is provided a device for controlling an internal combustion engine, comprising a variable valve mechanism for varying opening areas and working angles of at least either the intake valves or the exhaust valves, wherein a temperature of gas in the cylinder is calculated based on the opening area and the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the temperature of gas in the cylinder.

[0025] Namely, in the device for controlling an internal combustion engine according to the sixth aspect of the invention, a temperature of gas in the cylinder is calculated based on the opening area and the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based upon the temperature of gas in the cylinder. It is therefore possible to more suitably control the internal combustion engine by correctly calculating the temperature of gas in the cylinder than a case of calculating the temperature of gas in the cylinder based upon the opening areas only of the intake and exhaust valves but not upon the working angles of the intake and exhaust valves, or than a case of calculating the temperature of gas in the cylinder based upon the working angles only of the intake and exhaust valves but not upon the opening areas of the intake and exhaust valves.

[0026] According to a seventh aspect of the present invention, there is provided a device for controlling an internal combustion engine, comprising a variable valve mechanism for at least either the intake valves or the exhaust valves thereby to control the internal combustion engine based on a ratio or amount of the internal EGR gas, wherein a ratio or amount of the internal EGR gas is calculated based on the opening area of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the ratio or amount of the internal EGR gas.

[0027] In the device for controlling an internal combustion engine according to the seventh aspect of the invention, a ratio or amount of the internal EGR gas is calculated based on the opening area of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based upon the ratio or amount of the internal EGR gas. It is therefore possible to suitably control the internal combustion engine by correctly calculating the ratio or amount of the internal EGR gas without considering a change in the opening areas of the intake and exhaust valves effected by the variable valve mechanism unlike that of the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 9-209895. Namely, even when the opening areas of the intake and exhaust valves are varied, it is possible to correctly calculate the amount of the internal EGR gas and to suitably control the internal combustion engine. More specifically, the ratio or amount of the internal EGR gas increases with an increase in the opening area of the intake valve, the ratio or amount of the internal EGR gas being calculated based on the opening area of the intake valve, and the internal combustion engine is so controlled that the ignition timing is advanced with an increase in the ratio or amount of the internal EGR gas.

[0028] According to an eighth aspect of the present invention, there is provided a device for controlling an

internal combustion engine, comprising a variable valve mechanism for at least either the intake valves or the exhaust valves thereby to control the internal combustion engine based on a ratio or amount of the internal EGR gas, wherein a ratio or amount of the internal EGR gas is calculated based on the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the ratio or amount of the internal EGR gas.

[0029] In the device for controlling an internal combustion engine according to the eighth aspect of the invention, a ratio or amount of the internal EGR gas is calculated based on the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based upon the ratio or amount of the internal EGR gas. It is therefore possible to suitably control the internal combustion engine by correctly calculating the ratio or amount of the internal EGR gas without considering a change in the working angles of the intake and exhaust valves effected by the variable valve mechanism unlike that of the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 9-209895. Namely, even when the working angles of the intake and exhaust valves are varied, it is possible to correctly calculate the amount of the internal EGR gas and to suitably control the internal combustion engine. More specifically, the ratio or amount of the internal EGR gas increases with an increase in the working angle of the intake valve, the ratio or amount of the internal EGR gas being calculated based on the working angle of the intake valve, and the internal combustion engine is so controlled that the ignition timing is advanced with an increase in the ratio or amount of the internal EGR gas.

[0030] According to a ninth aspect of the present invention, there is provided a device for controlling an internal combustion engine, wherein a ratio or amount of the internal EGR gas is calculated based on the opening areas and the working angles of at least either the intake valves or the exhaust valves varied by a variable valve mechanism, and the internal combustion engine is controlled based on the ratio or amount of the internal EGR gas.

[0031] In the device for controlling an internal combustion engine according to the ninth aspect of the invention, a ratio or amount of the internal EGR gas is calculated based on the opening area and the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based upon the ratio or amount of the internal EGR gas. It is therefore possible to more suitably control the internal combustion engine by correctly calculating the ratio or amount of the internal EGR gas than a case of calculating the ratio or amount of the internal EGR gas based upon the opening areas only of the intake and exhaust valves but not upon the

working angles of the intake and exhaust valves, or than a case of calculating the ratio or amount of the internal EGR gas based upon the working angles only of the intake and exhaust valves but not upon the opening areas of the intake and exhaust valves.

[0032] According to a tenth aspect of the present invention, there is provided a device for controlling an internal combustion engine, comprising a variable valve mechanism for at least either the intake valves or the exhaust valves thereby to control the internal combustion engine based on a degree of turbulence in the cylinder that is estimated based on the opening area of the intake valve varied by the variable valve mechanism, wherein it is so estimated that a degree of turbulence in the cylinder increases with a decrease in the opening area of the intake valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the estimated degree of turbulence in the cylinder.

[0033] In the device for controlling an internal combustion engine according to the tenth aspect of the invention, it is estimated that a degree of turbulence in the cylinder increases with a decrease in the opening area of the intake valve varied by the variable valve mechanism, and the internal combustion engine is controlled based upon the estimated degree of turbulence in the cylinder. Even when the opening area of the intake valve is varied by the variable valve mechanism, therefore, the degree of turbulence in the cylinder is correctly estimated and the internal combustion engine is suitably controlled unlike that of using the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 2000-73800 according to which it is so estimated that a degree of turbulence in the cylinder decreases with a decrease in the opening area of the intake valve, and the internal combustion engine is controlled based on the estimated degree of turbulence in the cylinder. More specifically, the degree of turbulence in the cylinder increases with a decrease in the opening area of the intake valve, the degree of turbulence in the cylinder being estimated based on the opening area of the intake valve, and the internal combustion engine is so controlled that the ignition timing is delayed with an increase in the degree of turbulence in the cylinder.

Brief Description of the Drawings:

[0034]

Fig. 1 is a view schematically illustrating a first embodiment of a device for controlling an internal combustion engine according to the present invention; Fig. 2 is a view illustrating, in detail, an intake system of the device for controlling an internal combustion engine shown in Fig. 1; Fig. 3 is a view illustrating in detail a cam for an intake valve and a cam shaft shown in Fig. 1;

Fig. 4 is a view illustrating in detail a device for changing the valve-lifting amount shown in Fig. 1; Fig. 5 is a diagram illustrating a change in the valve-lifting amount of the intake valve accompanying the operation of the device for changing the valve-lifting amount;

Fig. 6 is a view illustrating in detail an opening/closing timing shifting device shown in Fig. 1;

Fig. 7 is a diagram illustrating how the opening/closing timing of the intake valve shifts accompanying the operation of the opening/closing timing shifting device;

Fig. 8 is a flowchart illustrating a method of calculating the ignition timing according to the first embodiment;

Fig. 9 is a diagram illustrating a relationship among the normal condition of pressure PCYLb in the cylinder at the compression top dead center, the valve-lifting amount LT and the pressure PM in the intake pipe;

Fig. 10 is a diagram illustrating a relationship among the normal condition of pressure PCYLb in the cylinder at the compression top dead center, the working angle VA and the pressure PM in the intake pipe;

Fig. 11 is a diagram illustrating a relationship among the normal condition of pressure PCYLb in the cylinder at the compression top dead center, the working angle VA and the pressure PM in the intake pipe;

Fig. 12 is a diagram illustrating a relationship among the normal condition of pressure PCYLb in the cylinder at the compression top dead center, the opening/closing timing (phase) VT and the pressure PM in the intake pipe;

Fig. 13 is a diagram illustrating a relationship among the normal condition of pressure PCYLb in the cylinder at the compression top dead center, the opening/closing timing (phase) VT and the pressure PM in the intake pipe;

Fig. 14 is a diagram illustrating a relationship between the normal condition of pressure PCYLb in the cylinder at the compression top dead center and the engine rotational speed NE;

Fig. 15 is a diagram illustrating a relationship among the ignition timing SA, the pressure PCYL in the cylinder at the compression top dead center, and the intake air amount GN taken in by the cylinder per one revolution;

Fig. 16 is a diagram illustrating a relationship between the ignition timing SA and the engine rotational speed NE;

Fig. 17 is a flowchart illustrating a method of calculating the amount of fuel injection according to a second embodiment;

Fig. 18 is a diagram illustrating a relationship among the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center, the valve-lifting amount LT and the pressure PM in the intake pipe;

Fig. 19 is a diagram illustrating a relationship among the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center, the working angle VA and the pressure PM in the intake pipe; Fig. 20 is a diagram illustrating a relationship among the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center, the opening/closing timing (phase) VT and the pressure PM in the intake pipe; Fig. 21 is a diagram illustrating a relationship between the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center and the engine rotational speed NE; Fig. 22 is a diagram illustrating a relationship among the fuel injection amount QINJ, the pressure PCYLIN in the cylinder at the intake bottom dead center, and the opening/closing timing (phase, valve overlapping) VT; Fig. 23 is a flowchart illustrating a method of calculating the ignition timing according to a third embodiment; Fig. 24 is a diagram illustrating a relationship among the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center, the valve-lifting amount LT and the opening/closing timing (phase) VT; Fig. 25 is a diagram illustrating a relationship among the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center, the valve-lifting amount LT and the opening/closing timing (phase) VT; Fig. 26 is a diagram illustrating a relationship among the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center, the valve-lifting amount LT and the working angle VA; Fig. 27 is a diagram illustrating a relationship among the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center, the valve-lifting amount LT and the working angle VA; Fig. 28 is a diagram illustrating a relationship between the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center and the pressure PM in the intake pipe; Fig. 29 is a diagram illustrating a relationship between the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center and the engine rotational speed NE; Fig. 30 is a diagram illustrating a relationship among the corrected heat value KTWALL, the difference between the cylinder wall temperature Twall and the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center, and the engine rotational speed NE; Fig. 31 is a diagram illustrating a relationship among the intake air temperature correction value KTIN, the engine cooling water temperature Tw, and the

intake air amount Ga;

Fig. 32 is a diagram illustrating a relationship between the internal EGR gas temperature correction value KTEGR and the ratio of the internal EGR gas;

Fig. 33 is a diagram illustrating a relationship among the internal EGR gas temperature correction value KTEGR, the ignition timing of the previous time and the amount of gas burnt per one revolution of the previous time;

Fig. 34 is a diagram illustrating a relationship between the internal EGR gas temperature correction value KTEGR and the air-fuel ratio of the previous time;

Fig. 35 is a diagram illustrating a relationship among the ignition timing SA, the temperature TCYL of gas in the cylinder at the compression top dead center and the intake air amount GN per a revolution;

Fig. 36 is a flowchart illustrating a method of calculating the ignition timing according to a fourth embodiment;

Fig. 37 is a diagram illustrating a relationship among the normal condition steady-state ratio KEGRb of the internal EGR gas, the valve-lifting amount LT and the opening/closing timing (phase) VT;

Fig. 38 is a diagram illustrating a relationship among the normal condition steady-state ratio KEGRb of the internal EGR gas ratio, the working angle VA and the opening/closing timing (phase) VT;

Fig. 39 is a diagram illustrating a relationship between the normal condition steady-state ratio KEGRb of the internal EGR gas ratio and the pressure PM in the intake pipe;

Fig. 40 is a diagram illustrating a relationship between the normal condition steady-state ratio KEGRb of the internal EGR gas ratio and the engine rotational speed NE;

Fig. 41 is a diagram illustrating a relationship between the atmospheric pressure correction coefficient KPA and the atmospheric pressure;

Fig. 42 is a diagram illustrating a relationship among the back pressure, the engine rotational speed NE and the intake air amount GN per one revolution;

Fig. 43 is a diagram illustrating a relationship between the back pressure and the backpressure correction coefficient for correcting the internal EGR gas ratio;

Fig. 44 is a diagram illustrating a relationship among the amount of the blown-back gas, the average opening area of the intake valve 2 (average opening area of the intake valve during the valve overlapping period) and the average pressure differential before and after the intake valve 2 (average differential between the pressure in the cylinder and the pressure in the intake pipe during the valve overlapping period);

Fig. 45 is a diagram illustrating a relationship between the amount of the blown-back gas and the steady-state ratio KEGRST of the internal EGR gas;

Fig. 46 is a diagram illustrating a relationship among the degree of effect due to the internal EGR gas of the previous time (= 1 - ratio of change KEGRSM from the previous time), the ratio KEGRO of the internal EGR gas in the previous time and the pressure PM in the intake pipe;

Fig. 47 is a diagram illustrating a relationship among the ignition timing SA, the ratio KEGR of the internal EGR gas and the intake air amount GN per a revolution;

Fig. 48 is a diagram illustrating a relationship between the ignition timing SA and the engine rotational speed NE;

Fig. 49 is a flowchart illustrating a method of calculating the ignition timing according to a fifth embodiment;

Fig. 50 is a diagram illustrating a relationship among the turbulence CYLTRB in the cylinder, the valve-lifting amount LT and the opening/closing timing (phase) VT;

Fig. 51 is a diagram illustrating a relationship among the turbulence CYLTRB in the cylinder, the working angle VA and the opening/closing timing (phase) VT;

Fig. 52 is a diagram illustrating a relationship between the turbulence CYLTRB in the cylinder and the pressure PM in the intake pipe;

Fig. 53 is a diagram illustrating a relationship between the turbulence CYLTRB in the cylinder and the engine rotational speed NE;

Fig. 54 is a diagram illustrating a relationship among the ignition timing SA, the turbulence CYLTRB in the cylinder and the air intake amount GN per a revolution;

Fig. 55 is a diagram illustrating a relationship between the ignition timing SA and the engine rotational speed NE;

Fig. 56 is a flowchart illustrating a method of controlling the cam according to a sixth embodiment;

Fig. 57 is a diagram illustrating a relationship among the accelerator opening degree, the engine rotational speed and the cam to be selected;

Fig. 58 is a diagram illustrating a relationship among the delay in changing the cam, the engine rotational speed and the cooling water temperature;

Fig. 59 is a diagram illustrating a relationship between the delay in changing the cam and the hydraulic pressure;

Fig. 60 is a diagram illustrating a relationship between the timing for producing an instruction for changing the cam and the timing at which the cam really changes;

Fig. 61 is a flowchart illustrating a method of calculating the amount of fuel injection according to a sixth embodiment;

Fig. 62 is a diagram illustrating a relationship among the response correction coefficient, the type of cam, the engine rotational speed and the intake air

amount GN per one revolution;

Fig. 63 is a diagram illustrating a relationship between the amount of fuel injection and the intake air amount per one revolution;

Fig. 64 is a flowchart illustrating a routine for calculating the ignition timing according to the sixth embodiment; and

Fig. 65 is a diagram illustrating a relationship among the ignition timing, the type of cam, the engine rotational speed and the intake air amount GN per one revolution.

Best Mode for Carrying Out the Invention:

[0035] Embodiments of the invention will now be described with reference to the accompanying drawings.

[0036] Fig. 1 is a view schematically illustrating a first embodiment of a device for controlling an internal combustion engine according to the present invention, and Fig. 2 is a view illustrating, in detail, an intake system of the device for controlling an internal combustion engine shown in Fig. 1. In Figs. 1 and 2, reference numeral 1 denotes an internal combustion engine, 2 denotes intake valves, 3 denotes exhaust valves, 4 denotes cams for opening and closing the intake valves, 5 denotes cams for opening and closing the exhaust valves, 6 denotes a cam shaft supporting the cams 4 for intake valves, and 7 denotes a cam shaft supporting the cams 5 for exhaust valves. Fig. 3 is a view illustrating in detail the cam for the intake valve and the cam shaft shown in Fig. 1. As shown in Fig. 3, the cam 4 according to this embodiment has a cam profile that is changing in the direction of the center axis of the cam shaft. That is, the cam 4 according to this embodiment has a nose at the left end in Fig. 3 which is higher than a nose at the right end. That is, the valve-lifting amount of the intake valve 2 according to this embodiment is smaller when the valve lifter is in contact with the right end of the cam 4 than when the valve lifter is in contact with the left end of the cam 4.

[0037] Reverting to Figs. 1 and 2, reference numeral 8 denotes a combustion chamber formed in the cylinder, and 9 denotes a device for changing the valve-lifting amount by moving the cam 4 in a direction of the center axis of the cam shaft in order to change the valve-lifting amount. Namely, upon operating the device 9 for changing the valve-lifting amount, the valve lifter is brought into contact with the cam 4 at the left end (Fig. 3) of the cam 4 or the valve lifter is brought into contact with the cam 4 at the right end (Fig. 3) of the cam 4. When the valve-lifting amount of the intake valve 2 is changed by the device 9 for changing the valve-lifting amount, the opening area of the intake valve 2 changes. With the intake valve 2 of this embodiment, the opening area of the intake valve 2 increases with an increase in the valve-lifting amount. Reference numeral 10 denotes a driver for driving the device 9 for changing the valve-lifting amount, and 11 denotes an opening/closing timing

shifting device for shifting the opening/closing timing of the intake valve without changing the valve-opening period of the intake valve 2. Namely, by operating the opening/closing timing shifting device 11, the opening/closing timing of the intake valve 2 can be shifted toward the advancing side or toward the delaying side. Reference numeral 12 denotes an oil control valve for controlling the hydraulic pressure for actuating the opening/closing timing shifting device 11. The variable valve mechanism according to this embodiment includes both the device 9 for changing the valve-lifting amount and the opening/closing timing shifting device 11.

[0038] Reference numeral 13 denotes a crank shaft, 14 denotes an oil pan, 15 denotes a fuel injection valve, 16 denotes a sensor for detecting the valve-lifting amount of the intake valve 2 and the amount of shifting the opening/closing timing, and reference numeral 17 denotes a sensor for detecting the engine rotational speed. Reference numeral 18 denotes an intake pipe pressure sensor for detecting the pressure in the intake pipe through which the intake air is fed into the cylinder, 19 denotes an air flow meter, 20 denotes a cooling water temperature sensor for detecting the temperature of the internal combustion engine cooling water, 21 denotes an intake air temperature sensor for detecting the temperature of the intake air fed into the cylinder through the intake pipe, and 22 denotes an ECU (electronic control unit). Reference numeral 50 denotes a cylinder, 51 and 52 denote intake pipes, 53 denotes a surge tank, 54 denotes an exhaust pipe, and 55 denotes a spark plug.

[0039] Fig. 4 is a view illustrating in detail the device for changing the valve-lifting amount shown in Fig. 1. In Fig. 4, reference numeral 30 denotes a magnetic material coupled to the cam shaft 6 for the intake valves, 31 denotes a coil for urging the magnetic material 30 toward the left, and 32 denotes a compression spring for urging the magnetic material 30 toward the right. As the amount of electric current supplied to the coil 31 increases, the cam 4 and the cam shaft 6 move toward the left by an increased amount, and the valve-lifting amount of the intake valve 2 decreases.

[0040] Fig. 5 is a diagram illustrating a change in the valve-lifting amount of the intake valve accompanying the operation of the device for changing the valve-lifting amount. Referring to Fig. 5, as the amount of electric current supplied to the coil 31 decreases, the valve-lifting amount of the intake valve 2 increases (solid line → broken line → dot-dash chain line). In this embodiment, further, the valve-opening period of the intake valve 2 varies accompanying the operation of the device 9 for changing the valve-lifting amount. Namely, the working angle of the intake valve 2 changes, too. If described in detail, the working angle of the intake valve 2 increases (solid line → broken line → dot-dash chain line) accompanying an increase in the valve-lifting amount of the intake valve 2. In this embodiment, further, the timing at which the valve-lifting amount of the intake valve 2 be-

comes a peak also varies accompanying the operation of the device 9 for changing the valve-lifting amount. If described in detail, the timing at which the valve-lifting amount of the intake valve 2 becomes a peak is delayed (solid line → broken line → dot-dash chain line) accompanying an increase in the valve-lifting amount of the intake valve 2.

[0041] Fig. 6 is a view illustrating in detail the opening/closing timing shifting device shown in Fig. 1. In Fig. 6, reference numeral 40 denotes a fluid passage on the advancing side for shifting the opening/closing timing of the intake valve 2 toward the advancing side, reference numeral 41 denotes a fluid passage on the delaying side for shifting the opening/closing timing of the intake valve 2 toward the delaying side, and 42 denotes an oil pump. As the hydraulic pressure increases in the fluid passage 40 on the advancing side, the opening/closing timing of the intake valve 2 is shifted toward the advancing side. Namely, the rotational phase of the cam shaft 6 is advanced with respect to the crank shaft 13. As the hydraulic pressure increases in the fluid passage 41 on the delaying side, on the other hand, the opening/closing timing of the intake valve 2 is shifted toward the delaying side. Namely, the rotational phase of the cam shaft 6 is delayed with respect to the crank shaft 13.

[0042] Fig. 7 is a diagram illustrating how the opening/closing timing of the intake valve shifts accompanying the operation of the opening/closing timing shifting device. As the hydraulic pressure increases in the fluid passage 40 on the advancing side as shown in Fig. 7, the opening/closing timing of the intake valve 2 is shifted toward the advancing side (solid line → broken line → dot-dash chain line). Here, the valve-opening period of the intake valve 2 remains unchanged. Namely, there is no change in the length of period in which the intake valve 2 remains opened.

[0043] As the valve-lifting amount of the intake valve 2, working angle and the opening/closing timing (phase) are varied by the device 9 for changing the valve-lifting amount and by the opening/closing timing shifting device 11 as described above, then, the pressure in the cylinder varies. If the ignition is conducted at a predetermined timing irrespective of a change in the pressure in the cylinder, an optimum ignition timing is not accomplished, and the internal combustion engine is not suitably controlled. In order to conduct the ignition at an optimum timing and to suitably control the internal combustion engine, therefore, the pressure in the cylinder must be correctly calculated depending upon changes in the valve-lifting amount of the intake valve 2, upon the working angle and upon the opening/closing timing (phase) thereof.

[0044] Fig. 8 is a flowchart illustrating a method of calculating the ignition timing according to the embodiment. This routine is executed at predetermined time intervals. When the routine starts as shown in Fig. 8, it is, first, judged at step 100 if the engine is being started. When the result is YES, the pressure in the cylinder is

correctly calculated at the start of the engine where the amount of the fuel is being increased, it is so judged based thereupon that there is no need to determine the ignition timing, and the routine ends. When the result is NO, on the other hand, the routine proceeds to step 101. At step 101, the normal condition of pressure PCYLb in the cylinder at the compression top dead center is calculated based on the valve-lifting amount LT of the intake valve 2, working angle VA, opening/closing timing VT, pressure PM in the intake pipe and the engine rotational speed NE.

[0045] Fig. 9 is a diagram illustrating a relationship among the normal condition of pressure PCYLb in the cylinder at the compression top dead center, the valve-lifting amount LT and the pressure PM in the intake pipe. As shown in Fig. 9, the normal condition of pressure PCYLb in the cylinder at the compression top dead center calculated at step 101 increases with an increase in the valve-lifting amount LT, or increases with an increase in the pressure PM in the intake pipe. Fig. 10 is a diagram illustrating a relationship among the normal condition of pressure PCYLb in the cylinder at the compression top dead center, the working angle VA and the pressure PM in the intake pipe. As shown in Fig. 10, the normal condition of pressure PCYLb in the cylinder at the compression top dead center calculated at step 101 increases with a decrease in the working angle VA when the intake valve 2 is fully closed after the intake bottom dead center. Fig. 11 is a diagram illustrating a relationship among the normal condition of pressure PCYLb in the cylinder at the compression top dead center, the working angle VA and the pressure PM in the intake pipe. As shown in Fig. 11, the normal condition of pressure PCYLb in the cylinder at the compression top dead center calculated at step 101 increases with an increase in the working angle VA when the intake valve 2 is fully closed before the intake bottom dead center.

[0046] Fig. 12 is a diagram illustrating a relationship among the normal condition of pressure PCYLb in the cylinder at the compression top dead center, the opening/closing timing (phase) VT and the pressure PM in the intake pipe. As shown in Fig. 12, the normal condition of pressure PCYLb in the cylinder at the compression top dead center calculated at step 101 increases as the opening/closing timing (phase) VT advances when the intake valve 2 is fully closed after the intake bottom dead center. Fig. 13 is a diagram illustrating a relationship among the normal condition of pressure PCYLb in the cylinder at the compression top dead center, the opening/closing timing (phase) VT and the pressure PM in the intake pipe. As shown in Fig. 13, the normal condition of pressure PCYLb in the cylinder at the compression top dead center calculated at step 101 increases as the opening/closing timing (phase) VT delays when the intake valve 2 is fully closed before the intake bottom dead center. Fig. 14 is a diagram illustrating a relationship between the normal condition of pressure PCYLb in the cylinder at the compression top dead

center and the engine rotational speed NE. As shown in Fig. 14, the normal condition of pressure PCYLb in the cylinder at the compression top dead center calculated at step 101 becomes a peak when the engine rotational speed NE is an intermediate speed.

[0047] Reverting to the description of Fig. 8, a pressure PCYL in the cylinder at the compression top dead center is calculated at step 102 from the normal condition of pressure PCYLb in the cylinder at the compression top dead center under the present engine operating conditions. Then, at step 103, an ignition timing SA is calculated based on the pressure PCYL in the cylinder at the compression top dead center, engine rotational speed NE, and intake air amount GN taken in by the cylinder per a revolution, i.e., the intake air amount GN taken in by the cylinder during one time of intake stroke. Fig. 15 is a diagram illustrating a relationship among the ignition timing SA, the pressure PCYL in the cylinder at the compression top dead center, and the intake air amount GN taken in by the cylinder per one revolution. As shown in Fig. 15, the ignition timing SA calculated at step 103 is delayed as the pressure PCYL increases in the cylinder at the compression top dead center, and is delayed with an increase in the intake air amount GN taken in by the cylinder per one revolution. Fig. 16 is a diagram illustrating a relationship between the ignition timing SA and the engine rotational speed NE. As shown in Fig. 16, the ignition timing SA calculated at step 103 advances with an increase in the engine rotational speed NE.

[0048] In this embodiment as described above, a pressure in the cylinder (pressure PCYL in the cylinder at the compression top dead center) is calculated at steps 101 and 102 in Fig. 8 based on the opening area of the intake valve 2 that varies depending upon the valve-lifting amount LT varied by the device 9 for changing the valve-lifting amount which is the variable valve mechanism, and the internal combustion engine is controlled based on the pressure in the cylinder. According to this embodiment, therefore, the internal combustion engine can be controlled based not only upon the peak combustion pressure in the cylinder but also upon the pressure in the cylinder at a moment other than the peak combustion pressure unlike the case of detecting the pressure in the cylinder by using the cylinder pressure sensor employed by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 9-53503. The internal combustion engine can be suitably controlled even when the opening area of the intake valve 2 is varied. More specifically, the pressure in the cylinder calculated based on the opening area of the intake valve increases with an increase in the opening area of the intake valve 2 as shown in Fig. 9, and the internal combustion engine is so controlled that the ignition timing SA is delayed with an increase in the pressure in the cylinder as shown in Fig. 15.

[0049] In this embodiment, further, the pressure in the

cylinder (pressure PCYL in the cylinder at the compression top dead center) is calculated at steps 101 and 102 in Fig. 8 based on the working angle VA of the intake valve 2 that is varied by the device 9 for changing the valve-lifting amount which is the variable valve mechanism, and the internal combustion engine is controlled based on the pressure in the cylinder. According to this embodiment, therefore, the internal combustion engine can be controlled based not only upon the peak combustion pressure in the cylinder but also upon the pressure in the cylinder at a moment other than the peak combustion pressure unlike the case of detecting the pressure in the cylinder by using the cylinder pressure sensor employed by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 9-53503. The internal combustion engine can be suitably controlled even when the working angle VA of the intake valve 2 is varied. More specifically, the pressure in the cylinder calculated based on the working angle VA of the intake valve 2 increases with a decrease in the working angle VA of the intake valve 2 when the intake valve 2 is fully closed after the intake bottom dead center as shown in Fig. 10, and the internal combustion engine is so controlled that the ignition timing SA is delayed with an increase in the pressure in the cylinder as shown in Fig. 15. Further, the pressure in the cylinder calculated based on the working angle VA of the intake valve 2 increases with an increase in the working angle VA of the intake valve 2 when the intake valve 2 is fully closed before the intake bottom dead center as shown in Fig. 11, and the internal combustion engine is so controlled that the ignition timing SA is delayed with an increase in the pressure in the cylinder as shown in Fig. 15.

[0050] In this embodiment, further, the pressure in the cylinder (pressure PCYL in the cylinder at the compression top dead center) is calculated at steps 101 and 102 in Fig. 8 based on both the opening area and the working angle VA of the intake valve 2 that are varied by the device 9 for changing the valve-lifting amount which is the variable valve mechanism, and the internal combustion engine is controlled based on the pressure in the cylinder. According to this embodiment, therefore, the internal combustion engine can be suitably controlled by more correctly calculating the pressure in the cylinder than when the pressure in the cylinder is calculated based only upon the opening area of the intake valve 2 but not upon the working angle VA of the intake valve 2, or than when the pressure in the cylinder is calculated based only upon the working angle VA of the intake valve 2 but not upon the opening area of the intake valve 2.

[0051] In this embodiment, further, the pressure in the cylinder (pressure PCYL in the cylinder at the compression top dead center) is calculated at steps 101 and 102 in Fig. 8 based upon the opening/closing timing (phase) VT of the intake valve 2, pressure PM in the intake pipe and engine rotational speed NE, and the internal com-

bustion engine is controlled based on the pressure in the cylinder. According to this embodiment, therefore, the internal combustion engine can be suitably controlled by more correctly calculating the pressure in the cylinder than when the pressure in the cylinder is not calculated based on the opening/closing timing (phase) VT of the intake valve 2, pressure PM in the intake pipe and engine rotational speed NE.

[0052] In this embodiment, the pressure in the cylinder is calculated based on the opening area of the intake valve and the like, and the internal combustion engine is controlled based on the pressure in the cylinder. According to another embodiment, the pressure in the cylinder is calculated based on the opening areas of the exhaust valves, and the internal combustion engine is controlled based on the pressure in the cylinder. Namely, the invention can be applied not only to the intake valves but also to the exhaust valves.

[0053] Described below is a second embodiment of the device for controlling an internal combustion engine according to the invention. The constitution of this embodiment is nearly the same as the constitution of the first embodiment illustrated in Figs. 1 to 7. In this embodiment, too, the pressure in the cylinder varies as the valve-lifting amount of the intake valve 2, working angle and opening/closing timing (phase) are varied by the device 9 for changing the valve-lifting amount and by the opening/closing timing shifting device 11. If the amount of fuel injection is set to be constant irrespective of a change in the pressure in the cylinder, the real air-fuel ratio deviates from a target air-fuel ratio, and the internal combustion engine is not suitably controlled. In order to calculate an optimum amount of fuel injection and to suitably control the internal combustion engine, therefore, the pressure in the cylinder must be correctly calculated depending upon the valve-lifting amount of the intake valve 2, upon the working angle and upon the opening/closing timing (phase) thereof.

[0054] Fig. 17 is a flowchart illustrating a method of calculating the amount of fuel injection according to the embodiment. This routine is executed at predetermined time intervals. When the routine starts as shown in Fig. 17, it is first judged at step 200 if the engine is being started. When the result is YES, the amount of fuel injection is determined irrespective of the pressure in the cylinder at the start of the engine where the amount of the fuel is being increased, it is so judged based thereupon that there is no need to correctly calculate the pressure in the cylinder for determining the amount of fuel injection, and the routine ends. When the result is NO, on the other hand, the routine proceeds to step 201. At step 201, the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center is calculated based on the valve-lifting amount LT of the intake valve 2, working angle VA, opening/closing timing VT, pressure PM in the intake pipe and the engine rotational speed NE.

[0055] Fig. 18 is a diagram illustrating a relationship

among the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center, the valve-lifting amount LT and the pressure PM in the intake pipe. As shown in Fig. 18, the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center calculated at step 201 increases with an increase in the valve-lifting amount LT, or increases with an increase in the pressure PM in the intake pipe. Fig. 19 is a diagram illustrating a relationship among the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center, the working angle VA and the pressure PM in the intake pipe. As shown in Fig. 19, the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center calculated at step 201 increases with a decrease in the working angle VA.

[0056] Fig. 20 is a diagram illustrating a relationship among the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center, the opening/closing timing (phase) VT and the pressure PM in the intake pipe. As shown in Fig. 20, the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center calculated at step 201 increases as the opening/closing timing (phase) VT advances. Fig. 21 is a diagram illustrating a relationship between the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center and the engine rotational speed NE. As shown in Fig. 21, the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center calculated at step 201 becomes a peak when the engine rotational speed NE is an intermediate speed.

[0057] Reverting to the description of Fig. 17, the pressure PCYLIN in the cylinder at the intake bottom dead center is calculated at step 202 from the normal condition of pressure PCYLINb in the cylinder at the intake bottom dead center under the present engine operating conditions. Then, at step 203, the fuel injection amount QINJ is calculated based on the pressure PCYLIN in the cylinder at the intake bottom dead center and opening/closing timing (phase, valve overlapping) VT. Fig. 22 is a diagram illustrating a relationship among the fuel injection amount QINJ, the pressure PCYLIN in the cylinder at the intake bottom dead center, and the opening/closing timing (phase, valve overlapping) VT. As shown in Fig. 22, the fuel injection amount QINJ calculated at step 203 increases as the pressure PCYLIN increases in the cylinder at the intake bottom dead center, and increases as the opening/closing timing (phase) VT is delayed, i.e., as the valve overlapping period between the intake valve 2 and the exhaust valve 3 decreases.

[0058] In this embodiment as described above, the pressure in the cylinder (pressure PCYLIN in the cylinder at the intake bottom dead center) is calculated at steps 201 and 202 in Fig. 17 based on the opening area of the intake valve 2 that varies depending upon the valve-lifting amount LT varied by the device 9 for changing the valve-lifting amount which is the variable valve mechanism, and the internal combustion engine is con-

trolled based on the pressure in the cylinder. According to this embodiment, therefore, the internal combustion engine can be controlled based not only upon the peak combustion pressure in the cylinder but also upon the pressure in the cylinder at a moment other than the peak combustion pressure unlike the case of detecting the pressure in the cylinder by using the cylinder pressure sensor employed by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 9-53503. The internal combustion engine can be suitably controlled even when the opening area of the intake valve 2 is varied. More specifically, the pressure in the cylinder calculated based on the opening area of the intake valve increases with an increase in the opening area of the intake valve 2 as shown in Fig. 18, and the internal combustion engine is so controlled that the fuel injection amount QINJ increases with an increase in the pressure in the cylinder as shown in Fig. 22.

[0059] In this embodiment, further, the pressure in the cylinder (pressure PCYLIN in the cylinder at the intake bottom dead center) is calculated at steps 201 and 202 in Fig. 17 based on the working angle VA of the intake valve 2 that is varied by the device 9 for changing the valve-lifting amount which is the variable valve mechanism, and the internal combustion engine is controlled based on the pressure in the cylinder. According to this embodiment, therefore, the internal combustion engine can be controlled based not only upon the peak combustion pressure in the cylinder but also upon the pressure in the cylinder at a moment other than the peak combustion pressure unlike the case of detecting the pressure in the cylinder by using the cylinder pressure sensor employed by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 9-53503. The internal combustion engine can be suitably controlled even when the working angle VA of the intake valve 2 is varied. More specifically, the pressure in the cylinder calculated based on the working angle VA of the intake valve 2 increases with a decrease in the working angle VA of the intake valve 2 as shown in Fig. 19, and the internal combustion engine is so controlled that the fuel injection amount QINJ increases with an increase in the pressure in the cylinder as shown in Fig. 22.

[0060] In this embodiment, further, the pressure in the cylinder (pressure PCYLIN in the cylinder at the intake bottom dead center) is calculated at steps 201 and 202 in Fig. 17 based on both the opening area and the working angle VA of the intake valve 2 that are varied by the device 9 for changing the valve-lifting amount which is the variable valve mechanism, and the internal combustion engine is controlled based on the pressure in the cylinder. According to this embodiment, therefore, the internal combustion engine can be suitably controlled by more correctly calculating the pressure in the cylinder than when the pressure in the cylinder is calculated based only upon the opening area of the intake valve 2

but not upon the working angle VA of the intake valve 2, or than when the pressure in the cylinder is calculated based only upon the working angle VA of the intake valve 2 but not upon the opening area of the intake valve 2.

[0061] In this embodiment, further, the pressure in the cylinder (pressure PCYLIN in the cylinder at the intake bottom dead center) is calculated at steps 201 and 202 in Fig. 17 based on the opening/closing timing (phase) VT of the intake valve 2, pressure PM in the intake pipe and engine rotational speed NE, and the internal combustion engine is controlled based on the pressure in the cylinder. According to this embodiment, therefore, the internal combustion engine can be suitably controlled by more correctly calculating the pressure in the cylinder than when the pressure in the cylinder is not calculated based on the opening/closing timing (phase) VT of the intake valve 2, pressure PM in the intake pipe and engine rotational speed NE.

[0062] In this embodiment, the pressure in the cylinder is calculated based on the opening area of the intake valve and the like, and the internal combustion engine is controlled based on the pressure in the cylinder. According to another embodiment, the pressure in the cylinder is calculated based on the opening areas of the exhaust valves, and the internal combustion engine is controlled based on the pressure in the cylinder. Namely, the invention can be applied not only to the intake valves but also to the exhaust valves.

[0063] Described below is a third embodiment of the device for controlling an internal combustion engine according to the invention. The constitution of this embodiment is nearly the same as the constitution of the first embodiment illustrated in Figs. 1 to 7. The temperature of gas in the cylinder varies as the valve-lifting amount of the intake valve 2, working angle and opening/closing timing (phase) are varied by the device 9 for changing the valve-lifting amount and by the opening/closing timing shifting device 11. If the ignition is conducted at a predetermined timing irrespective of a change in the temperature of gas in the cylinder, an optimum ignition timing is not accomplished, and the internal combustion engine is not suitably controlled. In order to conduct the ignition at an optimum timing and to suitably control the internal combustion engine, therefore, the temperature of gas in the cylinder must be correctly calculated depending upon changes in the valve-lifting amount of the intake valve 2, upon the working angle and upon the opening/closing timing (phase) thereof.

[0064] Fig. 23 is a flowchart illustrating a method of calculating the ignition timing according to the embodiment. This routine is executed at predetermined time intervals. When the routine starts as shown in Fig. 23, it is first judged at step 300 if the engine is being started. When the result is YES, the temperature of gas in the cylinder is correctly calculated at the start of the engine where the amount of the fuel is being increased, it is so judged based thereupon that there is no need of deter-

mining the ignition timing, and the routine ends. When the result is NO, on the other hand, the routine proceeds to step 301. At step 301, the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center is calculated based on the valve-lifting amount LT of the intake valve 2, working angle VA, opening/closing timing VT, pressure PM in the intake pipe and the engine rotational speed NE.

[0065] Fig. 24 is a diagram illustrating a relationship among the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center, the valve-lifting amount LT and the opening/closing timing (phase) VT. As shown in Fig. 24, the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center calculated at step 301 increases with an increase in the valve-lifting amount LT, or increases as the opening/closing timing (phase) VT advances when the intake valve 2 is fully closed after the intake bottom dead center. As shown in Fig. 25, the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center calculated at step 301 increases with an increase in the valve-lifting amount LT, or increases as the opening/closing timing (phase) VT is delayed when the intake valve 2 is fully closed before the intake bottom dead center. Fig. 26 is a diagram illustrating a relationship among the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center, the valve-lifting amount LT and the working angle VA. As shown in Fig. 26, the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center calculated at step 301 increases with an increase in the working angle VA when the intake valve 2 is fully closed after the intake bottom dead center. Fig. 27 is a diagram illustrating a relationship among the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center, the valve-lifting amount LT and the working angle VA. As shown in Fig. 27, the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center calculated at step 301 increases with a decrease in the working angle VA when the intake valve 2 is fully closed before the intake bottom dead center.

[0066] Fig. 28 is a diagram illustrating a relationship between the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center and the pressure PM in the intake pipe. As shown in Fig. 28, the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center calculated at step 301 increases with an increase in the pressure PM in the intake pipe. As shown in Fig. 29, the normal condition of temperature TCYLb of gas in the cylinder at the compression top dead center calculated at step 301 becomes a peak when the engine rotational speed NE is an intermediate speed.

[0067] Reverting to the description of Fig. 23, a corrected heat value KTWALL is calculated at step 302 based on the cylinder wall temperature Twall. The cyl-

inder wall temperature T_{wall} is estimated in compliance with the following formula,

$$T_{wall} = (K1 \times Ga(i) - Tw(i) - T_{wall}(i-1)) \times K2 + T_{wall}(i)$$

where $K1$ is a combustion correction coefficient, $K2$ is a response coefficient, Ga is an intake air amount calculated based on the output of the air flow meter 19, Tw is the temperature of the engine cooling water, i is a value of when the routine shown in Fig. 23 is executed this time, and $i-1$ is a value of when the routine shown in Fig. 23 was executed in the previous time.

[0068] The combustion correction coefficient $K1$ assumes a positive value when the fuel injected from the fuel injection valve 15 is burning to thereby cut the fuel, and assumes a negative value during the motoring in which no fuel is burning. Fig. 30 is a diagram illustrating a relationship among the corrected heat value $KTWALL$, the difference between the cylinder wall temperature T_{wall} and the normal condition of temperature $TCYLB$ of gas in the cylinder at the compression top dead center, and the engine rotational speed NE . As shown in Fig. 30, the corrected heat value $KTWALL$ increases as the cylinder wall temperature T_{wall} becomes higher than the normal condition of temperature $TCYLB$ of gas in the cylinder at the compression top dead center, and increases as the engine rotational speed NE decreases.

[0069] Reverting to the description of Fig. 23, an intake air temperature correction value $KTIN$ is calculated at step 303 based on the temperature of the intake air taken in by the cylinder.

Fig. 31 is a diagram illustrating a relationship among the intake air temperature correction value $KTIN$, the engine cooling water temperature Tw and the intake air amount Ga . As shown in Fig. 31, the intake air temperature correction value $KTIN$ increases with an increase in the engine cooling water temperature Tw , and increases with a decrease in the intake air amount Ga .

[0070] Reverting to the description of Fig. 23, an internal EGR gas temperature correction value $KTEGR$ is calculated at step 304 based on the ratio of the internal EGR gas in the cylinder.

Fig. 32 is a diagram illustrating a relationship between the internal EGR gas temperature correction value $KTEGR$ and the ratio of the internal EGR gas. As shown in Fig. 32, the internal EGR gas temperature correction value $KTEGR$ increases with an increase in the ratio of the internal EGR gas. As a modified example of this embodiment, it is possible to calculate the internal EGR gas temperature correction value $KTEGR$ based on the amount of the internal EGR gas. In this case, the internal EGR gas temperature correction value $KTEGR$ increases with an increase in the amount of the internal EGR gas. As another modified example of this embodiment, it is allowable to calculate the internal EGR gas temperature correction value $KTEGR$ based on the ignition timing of the previous time and the amount of the burnt gas

per a revolution of the previous time. Fig. 33 is a diagram illustrating a relationship among the internal EGR gas temperature correction value $KTEGR$, the ignition timing of the previous time and the amount of burnt gas per a revolution of the previous time. As shown in Fig. 33, the internal EGR gas temperature correction value $KTEGR$ increases as the ignition timing of the previous time is delayed, and increases with an increase in the amount of burnt gas per a revolution of the previous time. As a further modified example of this embodiment, it is possible to calculate the internal EGR gas temperature correction value $KTEGR$ based on the air-fuel ratio of the previous time. Fig. 34 is a diagram illustrating a relationship between the internal EGR gas temperature correction value $KTEGR$ and the air-fuel ratio of the previous time. As shown in Fig. 34, the internal EGR gas temperature correction value $KTEGR$ becomes a peak at an air-fuel ratio which is slightly richer than the stoichiometric ratio, and decreases toward either the rich side or the lean side.

[0071] Reverting to the description of Fig. 23, a temperature $TCYL$ of gas in the cylinder at the compression top dead center ($TCYL \leftarrow TCYLB \times KTWALL \times KTIN \times KTEGR$) is calculated at step 305 based upon the normal condition of temperature $TCYLB$ of gas in the cylinder at the compression top dead center calculated at step 301, corrected heat value $KTWALL$ calculated at step 302, intake air temperature correction value $KTIN$ calculated at step 303 and internal EGR gas temperature correction value $KTEGR$ calculated at step 304. Then, at step 306, an ignition timing SA is calculated based upon the gas temperature $TCYL$ at the compression top dead center, intake air amount GN per one revolution and engine rotational speed NE . Fig. 35 is a diagram illustrating a relationship among the ignition timing SA , the temperature $TCYL$ of gas in the cylinder at the compression top dead center and the intake air amount GN per a revolution. As shown in Fig. 35, the ignition timing SA calculated at step 306 is delayed as the temperature $TCYL$ of gas in the cylinder at the compression top dead center becomes high, and is delayed as the intake air amount GN increases per a revolution. As shown in Fig. 16, further, the ignition timing SA calculated at step 306 advances as the engine rotational speed NE increases.

[0072] In this embodiment as described above, the temperature of gas in the cylinder (temperature $TCYL$ of gas in the cylinder at the compression top dead center) is calculated at steps 301 and 305 in Fig. 23 based upon the opening area of the intake valve 2 that varies depending upon the valve-lifting amount LT which is changed by the device 9 for changing the valve-lifting amount, which is the variable valve mechanism, and the internal combustion engine is controlled based upon the temperature of gas in the cylinder. According to this embodiment, therefore, it is possible to more suitably control the internal combustion engine than when the internal combustion engine is controlled based upon the

temperature of the cylinder wall, that is done by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 4-81574. The internal combustion engine can be suitably controlled even when the opening area of the intake valve 2 is varied. More specifically, the temperature of gas in the cylinder calculated based on the opening area of the intake valve increases with an increase in the opening area of the intake valve 2 as shown in Figs. 24 and 25, and the internal combustion engine is so controlled that the ignition timing SA is delayed as the temperature of gas in the cylinder increases as shown in Fig. 35.

[0073] In this embodiment, further, the temperature of gas in the cylinder (temperature TCYL of gas in the cylinder at the compression top dead center) is calculated at steps 301 and 305 in Fig. 23 based on the working angle VA of the intake valve 2 that is varied by the device 9 for changing the valve-lifting amount, which is the variable valve mechanism, and the internal combustion engine is controlled based on the temperature of gas in the cylinder. According to this embodiment, therefore, it is possible to more suitably control the internal combustion engine than when the internal combustion engine is controlled based upon the temperature of the cylinder wall, which is done by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 4-81574. The internal combustion engine can be suitably controlled even when the working angle VA of the intake valve 2 is varied. More specifically, when the intake valve 2 is fully closed after the suction bottom dead center as shown in Fig. 26, the temperature of gas in the cylinder calculated based on the working angle VA of the intake valve 2 increases with an increase in the working angle VA of the intake valve 2, and the internal combustion engine is so controlled that the ignition timing SA is delayed as the temperature of gas in the cylinder increases as shown in Fig. 35. Further, when the intake valve 2 is fully closed before the suction bottom dead center as shown in Fig. 27, the temperature of gas in the cylinder calculated based on the working angle VA of the intake valve 2 increases with a decrease in the working angle VA of the intake valve 2, and the internal combustion engine is so controlled that the ignition timing SA is delayed as the temperature of gas in the cylinder increases as shown in Fig. 35.

[0074] In this embodiment, further, the temperature of gas in the cylinder (temperature TCYL of gas in the cylinder at the compression top dead center) is calculated at steps 301 and 305 in Fig. 23 based on both the opening area and the working angle VA of the intake valve 2 that are varied by the device 9 for changing the valve-lifting amount, which is the variable valve mechanism, and the internal combustion engine is controlled based on the temperature of gas in the cylinder. According to this embodiment, therefore, it is possible to more suitably control the internal combustion engine by correctly calculating the temperature of gas in the cylinder than

when the temperature of gas in the cylinder is calculated based only upon the opening area of the intake valve 2 but not upon the working angle VA of the intake valve 2 or than when the temperature of gas in the cylinder is calculated based only upon the working angle VA of the intake valve 2 but not upon the opening area of the intake valve 2.

[0075] In this embodiment, further, the temperature of gas in the cylinder (temperature TCYL of gas in the cylinder at the compression top dead center) is calculated at steps 301 and 305 in Fig. 23 based upon the opening/closing timing (phase) VT of the intake valve 2, pressure PM in the intake pipe and the engine rotational speed NE, and the internal combustion engine is controlled based on the temperature of gas in the cylinder. According to this embodiment, therefore, it is possible to suitably control the internal combustion engine by more correctly calculating the temperature of gas in the cylinder than when the temperature of gas in the cylinder is not calculated based the opening/closing timing (phase) VT of the intake valve 2, pressure PM in the intake pipe, and engine rotational speed NE.

[0076] In this embodiment, further, the temperature of gas in the cylinder is corrected at step 302 in Fig. 23 based on the cylinder wall temperature T_{wall} and the engine rotational speed NE, the temperature of gas in the cylinder is corrected at step 303 based on the intake air amount Ga, and the temperature of gas in the cylinder is corrected at step 304 based on the amount of the internal EGR gas (ratio of the internal EGR gas), i.e., based on the temperature of the internal EGR gas that varies being affected thereby. According to this embodiment, therefore, it is possible to more suitably control the internal combustion engine than when the temperature of gas in the cylinder is not corrected based thereupon.

[0077] In this embodiment, the temperature of gas in the cylinder is calculated based on the opening area and the like of the intake valve, and the internal combustion engine is controlled based on the temperature of gas in the cylinder. In another embodiment, it is also possible to calculate the temperature of gas in the cylinder based on the opening area and the like of the exhaust valve, and to control the internal combustion engine based on the temperature of gas in the cylinder. Namely, this invention can be applied not only to the intake valves but also to the exhaust valves.

[0078] Described below is a fourth embodiment of the device for controlling an internal combustion engine according to the invention. The constitution of this embodiment is nearly the same as the constitution of the first embodiment illustrated in Figs. 1 to 7. The ratio of the internal EGR gas in the cylinder varies as the valve-lifting amount of the intake valve 2, working angle and opening/closing timing (phase) are varied by the device 9 for changing the valve-lifting amount and by the opening/closing timing shifting device 11. If the ignition is conducted at a predetermined timing irrespective of a

change in the ratio of the internal EGR gas, an optimum ignition timing is not accomplished, and the internal combustion engine is not suitably controlled. In order to conduct the ignition at an optimum timing and to suitably control the internal combustion engine, therefore, the ratio of the internal EGR gas must be correctly calculated depending upon changes in the valve-lifting amount of the intake valve 2, working angle and opening/closing timing (phase) thereof.

[0079] Fig. 36 is a flowchart illustrating a method of calculating the ignition timing according to the embodiment. This routine is executed at predetermined time intervals. When the routine starts as shown in Fig. 36, it is, first, judged at step 400 if the engine is being started. When the result is YES, a ratio of the internal EGR gas is correctly calculated at the starting of the engine, where the amount of the fuel is increased, it is so judged based thereupon that there is no need to determine the ignition timing, and the routine ends. When the result is NO, on the other hand, the routine proceeds to step 401. At step 401, the normal condition steady-state ratio $KEGRb$ of the internal EGR gas is calculated based on the valve-lifting amount LT of the intake valve 2, working angle VA , opening/closing timing VT , pressure PM in the intake pipe and the engine rotational speed NE .

[0080] Fig. 37 is a diagram illustrating a relationship among the normal condition steady-state ratio $KEGRb$ of the internal EGR gas, the valve-lifting amount LT and the opening/closing timing (phase) VT . As shown in Fig. 37, the normal condition steady-state ratio $KEGRb$ of the internal EGR gas calculated at step 401 increases with an increase in the valve-lifting amount LT , or increases as the opening/closing timing (phase) VT advances. Fig. 38 is a diagram illustrating a relationship among the normal condition steady-state ratio $KEGRb$ of the internal EGR gas, the working angle VA and the opening/closing timing (phase) VT . As shown in Fig. 38, the normal condition steady-state ratio $KEGRb$ of the internal EGR gas calculated at step 401 increases with an increase in the valve-lifting amount VA .

[0081] Fig. 39 is a diagram illustrating a relationship between the normal condition steady-state ratio $KEGRb$ of the internal EGR gas and the pressure PM in the intake pipe. As shown in Fig. 39, the normal condition steady-state ratio $KEGRb$ of the internal EGR gas calculated at step 401 decreases with an increase in pressure PM in the intake pipe. As shown in Fig. 40, the normal condition steady-state ratio $KEGRb$ of the internal EGR gas calculated at step 401 decreases with an increase in the engine rotational speed NE .

[0082] Reverting to the description of Fig. 36, a steady-state ratio $KEGRST$ of the internal EGR gas is calculated ($KEGRST \leftarrow KEGRb \times KPA$) at step 402 based on the normal condition steady-state ratio $KEGRb$ of the internal EGR gas and the atmospheric pressure correction coefficient KPA . Namely, the correction is effected by taking into consideration the atmospheric pressure having a large ratio of the internal EGR gas.

Fig. 41 is a diagram illustrating a relationship between the atmospheric pressure correction coefficient KPA and the atmospheric pressure. As shown in Fig. 41, the atmospheric pressure correction coefficient KPA increases with an increase in the atmospheric pressure. Namely, the ratio of the internal EGR gas increases with an increase in the atmospheric pressure. In a modified example of this embodiment, it is also possible to calculate the correction coefficient based on the back pressure instead of calculating the correction coefficient KPA based on the atmospheric pressure illustrated in Fig. 41, and to correct the ratio of the internal EGR gas based on the correction coefficient. Fig. 42 is a diagram illustrating a relationship among the back pressure, the engine rotational speed NE and the intake air amount GN per a revolution. As shown in Fig. 42, the back pressure increases with an increase in the engine rotational speed NE , or increases with an increase in the intake air amount GN per a revolution. Fig. 43 is a diagram illustrating a relationship between the back pressure correction coefficient and the back pressure for correcting the ratio of the internal EGR gas. As shown in Fig. 43, the back pressure correction coefficient increases with an increase in the back pressure. Namely, the ratio of the internal EGR gas increases with an increase in the back pressure.

[0083] In a modified example of the embodiment, further, the steady-state ratio $KEGRST$ of the internal EGR gas can be corrected at step that is not illustrated which is next of step 402 of Fig. 36 based upon the amount of the burnt gas (hereinafter referred to as "amount of blown-back gas") that is taken in again by the cylinder after being blown back into the intake pipe. Fig. 44 is a diagram illustrating a relationship among the amount of the blown-back gas, the average opening area of the intake valve 2 (average opening area of the intake valve during the valve overlapping period) and the average pressure differential before and after the intake valve 2 (average differential between the pressure in the cylinder and the pressure in the intake pipe during the valve overlapping period). As shown in Fig. 44, the amount of the blown-back gas increases with an increase in the opening area of the intake valve 2, and increases with an increase in the pressure differential before and after the intake valve, i.e., increases as the pressure in the cylinder becomes greater than the pressure in the intake pipe. Fig. 45 is a diagram illustrating a relationship between the steady-state ratio $KEGRST$ of the internal EGR gas and the amount of the blown-back gas.

As shown in Fig. 45, the steady-state ratio $KEGRST$ of the internal EGR gas increases with an increase in the amount of the blown-back gas. Namely, the steady-state ratio $KEGRST$ of the internal EGR gas increases with an increase in the opening area of the intake valve 2 or increases as the pressure in the cylinder becomes greater than the pressure in the intake pipe. According to this modified example, the ratio of the internal EGR gas is calculated based upon the opening area of the

intake valve 2 during the valve overlapping period varied by the variable valve mechanism, upon the pressure (pressure in the cylinder) on the downstream side of the intake valve 2 during the valve overlapping period and upon the pressure (pressure in the intake pipe) on the upstream side, and the internal combustion engine is controlled based on the ratio of the internal EGR gas. Therefore, the internal combustion engine can be suitably controlled by more correctly calculating the ratio of the internal EGR gas than when the ratio of the internal EGR gas is calculated based only upon the opening area of the intake valve varied by the variable valve mechanism or than when the ratio of the internal EGR gas is not calculated based on the pressure downstream of the intake valve during the valve overlapping period or on the pressure on the upstream side.

[0084] According to a further modified example, it is allowable to calculate the instantaneous ratio of the internal EGR gas based upon the opening area at regular intervals during the valve overlapping period and upon a difference between the pressure in the cylinder (pressure downstream of the intake valve 2) during the valve overlapping period and the pressure in the intake pipe (pressure upstream of the intake valve 2) at regular intervals, instead of relying upon the opening area of the intake valve during the valve overlapping period and the average differential between the pressure in the cylinder and the pressure in the intake pipe during the valve overlapping period, in order to control the internal combustion engine based on the ratio of the internal EGR gas obtained by integrating the instantaneous ratios of the internal EGR gas. According to this modified example, it is allowed to suitably control the internal combustion engine by correctly calculating the ratio of the internal EGR gas even when there are great variations in the opening area of the intake valve 2 during the valve overlapping period or in the pressure upstream of the intake valve during the valve overlapping period or in the pressure downstream thereof.

[0085] Reverting to the description of Fig. 36, a change $KEGRSM$ from the previous time is calculated at step 403 based on the ratio $KEGRO$ of the internal EGR gas of the previous time and the pressure PM in the intake pipe.

Fig. 46 is a diagram illustrating a relationship among the degree of effect ($= 1 - \text{change } KEGRSM \text{ from the previous time}$) due to the ratio of the internal EGR gas of the previous time, the ratio $KEGRO$ of the internal EGR gas of the previous time and the pressure PM in the intake pipe. As shown in Fig. 46, the degree of effect due to the ratio of the internal EGR gas of the previous time decreases with a decrease in the ratio $KEGRO$ of the internal EGR gas of the previous time, and decreases with an increase in the pressure PM in the intake pipe. Namely, the change $KEGRSM$ from the previous time increases with a decrease in the ratio $KEGRO$ of the internal EGR gas of the previous time and increases with an increase in the pressure PM in the intake pipe.

[0086] Reverting to the description of Fig. 36, a ratio $KEGR$ of the internal EGR gas is calculated ($KEGR \leftarrow (KEGRST - KEGRO) \times KEGRSM + KEGRO$) at step 404 based on the steady-state ratio $KEGRST$ of the internal EGR gas, ratio $KEGRO$ of the internal EGR gas of the previous time ($= \text{ratio } KEGR \text{ of the internal EGR gas calculated at step 404 when the routine was executed in the previous time}$) and change $KEGRSM$ from the previous time. Then, at step 405, an ignition timing SA is calculated based on the ratio $KEGR$ of the internal EGR gas, intake air amount GN per a revolution and engine rotational speed NE . As shown in Fig. 47, the ignition timing SA calculated at step 405 advances with an increase in the ratio $KEGR$ of the internal EGR gas, and advances with a decrease in the intake air amount N per one revolution. Fig. 48 is a diagram illustrating a relationship between the ignition timing SA and the engine rotational speed NE . As shown in Fig. 48, the ignition timing SA calculated at step 405 advances as the engine rotational speed NE increases.

[0087] In this embodiment as described above, the ratio of the internal EGR gas is calculated at steps 401 and 404 of Fig. 36 based upon the opening area of the intake valve 2 that is varied depending upon the valve-lifting amount LT which is changed by the device 9 for changing the valve-lifting amount, which is the variable valve mechanism, and the internal combustion engine is controlled based on the ratio of the internal EGR gas. According to this embodiment, therefore, it is possible to suitably control the internal combustion engine by more correctly calculating the ratio of the internal EGR gas than when the ratio of the internal EGR gas is calculated without considering a change in the opening area of the intake valve 2 by the variable valve mechanism, which is done by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 9-209895. Namely the internal combustion engine can be suitably controlled by correctly calculating the ratio of the internal EGR gas even when the opening area of the intake valve 2 is varied. More specifically, the ratio of the internal EGR gas calculated based on the opening area of the intake valve increases with an increase in the opening area of the intake valve 2 as shown in Fig. 37, and the internal combustion engine is so controlled that the ignition timing SA advances as the ratio of the internal EGR gas increases as shown in Fig. 47.

[0088] In this embodiment, further, the ratio of the internal EGR gas is calculated at steps 401 and 404 of Fig. 36 based upon the working angle VA of the intake valve 2 that is varied by the device 9 for changing the valve-lifting amount, which is the variable valve mechanism, and the internal combustion engine is controlled based on the ratio of the internal EGR gas. According to this embodiment, therefore, it is possible to suitably control the internal combustion engine by more correctly calculating the ratio of the internal EGR gas than when the ratio of the internal EGR gas is calculated without

considering a change in the working angle VA of the intake valve 2 due to the variable valve mechanism, which is done by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 9-209895. Namely, the internal combustion engine can be suitably controlled by correctly calculating the ratio of the internal EGR gas even when the working angle VA of the intake valve 2 is varied. More specifically, the ratio of the internal EGR gas calculated based on the opening area of the intake valve increases with an increase in the working angle VA of the intake valve 2 as shown in Fig. 38, and the internal combustion engine is so controlled that the ignition timing SA advances as the ratio of the internal EGR gas increases as shown in Fig. 47.

[0089] In this embodiment, further, the ratio of the internal EGR gas is calculated at steps 401 and 404 of Fig. 36 based upon both the opening area and the working angle VA of the intake valve 2 that are varied by the device 9 for changing the valve-lifting amount, which is the variable valve mechanism, and the internal combustion engine is controlled based on the ratio of the internal EGR gas. According to this embodiment, therefore, it is possible to suitably control the internal combustion engine by more correctly calculating the ratio of the internal EGR gas than when the ratio of the internal EGR gas is calculated based only upon the opening area of the intake valve 2 but not upon the working angle VA of the intake valve 2 or than when the ratio of the internal EGR gas is calculated based only upon the working angle VA of the intake valve 2 but not upon the opening area of the intake valve 2.

[0090] In this embodiment, further, the ratio of the internal EGR gas is calculated at steps 401 and 404 of Fig. 36 based upon the opening/closing timing (phase) VT of the intake valve 2, pressure PM in the intake pipe and engine rotational speed NE, and the internal combustion engine is controlled based on the ratio of the internal EGR gas. According to this embodiment, therefore, it is possible to suitably control the internal combustion engine by more correctly calculating the ratio of the internal EGR gas than when the ratio of the internal EGR gas is not calculated based on the opening/closing timing (phase) VT of the intake valve 2, pressure PM in the intake pipe and engine rotational speed NE.

[0091] In this embodiment, further, the ratio of the internal EGR gas is corrected at step 402 of Fig. 36 based on the atmospheric pressure. In the modified example at step 402, the ratio of the internal EGR gas is corrected based on the pressure in the exhaust pipe, i.e., based on the back pressure, and is further corrected at step 404 based on the ratio KEGRO of the internal EGR gas calculated by the routine in the previous time. According to this embodiment, therefore, it is possible to more suitably control the internal combustion engine than when the ratio of the internal EGR gas is not corrected based thereupon.

[0092] In the above-mentioned embodiment and the

modified example, the ratio of the internal EGR gas is calculated and the internal combustion engine is controlled based thereupon. In place of this, however, it is also possible to calculate the amount of the internal EGR gas based on the same methods as those described above and to control the internal combustion engine based thereupon. Namely, the tendencies of inclination of the curves in the above-mentioned diagrams are the same between when there is used the ratio of the internal EGR gas and when there is used the amount of the EGR gas.

[0093] In the above embodiment and the modified example, the ratio or amount of the internal EGR gas is calculated based on the opening area of the intake valve, and the internal combustion engine is controlled based on the ratio or amount of the internal EGR gas. In another embodiment, however, it is also possible to calculate the ratio or amount of the internal EGR gas based on the opening area of the exhaust valve and to control the internal combustion engine based on the ratio or amount of the internal EGR gas. Namely, the invention can be applied not only to the intake valves but also to the exhaust valves.

[0094] Described below is a fifth embodiment of the device for controlling an internal combustion engine according to the invention. The constitution of this embodiment is nearly the same as the constitution of the first embodiment illustrated in Figs. 1 to 7. The degree of turbulence in the cylinder varies as the valve-lifting amount of the intake valve 2, working angle and opening/closing timing (phase) are varied by the device 9 for changing the valve-lifting amount and by the opening/closing timing shifting device 11. If the ignition is conducted at a predetermined timing irrespective of a change in the degree of turbulence in the cylinder, an optimum ignition timing is not accomplished, and the internal combustion engine is not suitably controlled. In order to conduct the ignition at an optimum timing and to suitably control the internal combustion engine, therefore, the degree of turbulence in the cylinder must be correctly calculated depending upon changes in the valve-lifting amount of the intake valve 2, working angle and opening/closing timing (phase) thereof.

[0095] Fig. 49 is a flowchart illustrating a method of calculating the ignition timing according to the embodiment. This routine is executed at predetermined time intervals. When the routine starts as shown in Fig. 49, it is first judged at step 500 if the engine is being started. When the result is YES, the turbulence in the cylinder is correctly calculated at the start of the engine where the amount of the fuel is increased, it is so judged based thereupon that there is no need of determining the ignition timing, and the routine ends. When the result is NO, on the other hand, the routine proceeds to step 501. At step 501, the turbulence CYLTRB is calculated based on the valve-lifting amount LT of the intake valve 2, working angle VA, opening/closing timing VT, pressure PM in the intake pipe and engine rotational speed NE. Fig.

50 is a diagram illustrating a relationship among the turbulence CYLTRB in the cylinder, the valve-lifting amount LT and the opening/closing timing (phase) VT. As shown in Fig. 50, the turbulence CYLTRB in the cylinder calculated at step 501 increases with a decrease in the valve-lifting amount LT, or increases as the opening/closing timing (phase) VT delays. Fig. 51 is a diagram illustrating a relationship among the turbulence CYLTRB in the cylinder, the working angle VA and the opening/closing timing (phase) VT. As shown in Fig. 51, the turbulence CYLTRB in the cylinder calculated at step 501 increases with a decrease in the working angle VA.

[0096] Fig. 52 is a diagram illustrating a relationship between the turbulence CYLTRB in the cylinder and the pressure PM in the intake pipe. As shown in Fig. 52, the turbulence CYLTRB in the cylinder calculated at step 501 decreases with an increase in pressure PM in the intake pipe. Fig. 53 is a diagram illustrating a relationship between the turbulence CYLTRB in the cylinder and the engine rotational speed NE. As shown in Fig. 53, the turbulence CYLTRB in the cylinder calculated at step 501 increases with an increase in the engine rotational speed NE.

[0097] Reverting to the description of Fig. 49, an ignition timing SA is calculated based on the turbulence CYLTRB in the cylinder, intake air amount GN per a revolution and engine rotational speed NE. Fig. 54 is a diagram illustrating a relationship among the ignition timing SA, the turbulence CYLTRB in the cylinder and the intake air amount GN per one revolution. As shown in Fig. 54, the ignition timing SA calculated at step 502 is delayed with an increase in the turbulence CYLTRB in the cylinder, and is delayed with an increase in the intake air amount GN per a revolution. Fig. 55 is a diagram illustrating a relationship between the ignition timing SA and the engine rotational speed NE. As shown in Fig. 55, the ignition timing SA calculated at step 502 is advanced as the engine rotational speed NE increases.

[0098] In this embodiment as described above, the turbulence CYLTRB in the cylinder is calculated at step 501 of Fig. 49 based upon the opening area of the intake valve 2 that is varied depending upon the valve-lifting amount LT which is changed by the device 9 for changing the valve-lifting amount, which is the variable valve mechanism, and the internal combustion engine is controlled based on the turbulence CYLTRB in the cylinder. According to this embodiment, therefore, it is possible to suitably control the internal combustion engine by more correctly calculating the turbulence CYLTRB in the cylinder than when the turbulence CYLTRB in the cylinder is calculated without considering a change in the opening area of the intake valve 2 due to the variable valve mechanism, which is done by the device for controlling internal combustion engines taught in Japanese Unexamined Patent Publication (Kokai) No. 2000-73800. Namely, the internal combustion engine can be suitably controlled by correctly calculating the turbulence CYLTRB in the cylinder even when the open-

ing area of the intake valve 2 is varied. More specifically, the turbulence CYLTRB in the cylinder calculated based on the opening area of the intake valve increases with an increase in the opening area of the intake valve 2 as shown in Fig. 50, and the internal combustion engine is so controlled that the ignition timing SA is delayed as the turbulence CYLTRB in the cylinder increases as shown in Fig. 54.

[0099] In this embodiment, further, the turbulence CYLTRB in the cylinder is calculated at step 501 of Fig. 49 based upon the working angle VA of the intake valve 2, opening/closing timing (phase) VT of the intake valve 2, pressure PM in the intake pipe and engine rotational speed NE, and the internal combustion engine is controlled based on the turbulence CYLTRB in the cylinder. According to this embodiment, therefore, it is possible to suitably control the internal combustion engine by more correctly calculating the turbulence CYLTRB in the cylinder than when the turbulence CYLTRB in the cylinder is not calculated based on the working angle VA of the intake valve 2, opening/closing timing (phase) VT of the intake valve 2, pressure PM in the intake pipe and engine rotational speed NE. In the embodiment and in the modified example thereof, the turbulence in the cylinder is calculated based on the opening area of the intake valve, and the internal combustion engine is controlled based on the turbulence in the cylinder. In another embodiment, it is possible to calculate the turbulence in the cylinder based on the opening areas of the discharge valves and to control the internal combustion engine based on the turbulence in the cylinder. Namely, the invention can be applied not only to the intake valves but also to the exhaust valves.

[0100] Described below is a sixth embodiment of the device for controlling an internal combustion engine according to the invention. The constitution of this embodiment is nearly the same as the constitution of the first embodiment illustrated in Figs. 1 to 7 except the points that will be described later. Further, the control routine of this embodiment, which will be described later, is executed in combination with the control routine of any one of the embodiments described above. In the above embodiments, the cam has a nose of a height that is continuously changing as shown in Fig. 3. In this embodiment, instead, there are provided a high-speed cam H having a relatively high cam nose, a low-speed cam L having a relatively low cam nose and an intermediate-speed cam M having a cam nose of a height lying therebetween.

[0101] Fig. 56 is a flowchart illustrating a method of controlling the cam according to the embodiment. This routine is executed at regular time intervals. When the routine starts as shown in Fig. 56, an accelerator opening degree calculated based on the output value of an accelerator opening sensor (not shown) is read at step 600. Then, at step 601, an engine rotational speed calculated based on the output value of the engine rotational speed sensor 17 is read. At step 602, a cam is

selected based on the accelerator opening degree, engine rotational speed and relationship shown in Fig. 57. Fig. 57 is a diagram illustrating a relationship among the accelerator opening degree, the engine rotational speed and the cam to be selected. Referring to Fig. 57, when the accelerator opening degree is small and the engine rotational speed is low, the low-speed cam L is selected. The height of the cam nose to be selected increases with an increase in the accelerator opening degree, or the height of the cam nose to be selected increases with an increase in the engine rotational speed.

[0102] Then, at step 603, it is judged whether it is a timing for changing the cam. When the result is YES, the routine proceeds to step 604 and when the result is NO, the routine ends. At step 604, the cam is changed into the one that is selected. Then, at step 605, a delay in changing the cam is estimated based upon the engine rotational speed, upon the cooling water temperature calculated based on the output value of the cooling water temperature sensor 20 and upon a relationship illustrated in Fig. 58. Fig. 58 is a diagram illustrating the relationship among the delay in changing the cam, the engine rotational speed and the cooling water temperature. Referring to Fig. 58, the delay in changing the cam decreases with an increase in the engine rotational speed, and decreases with an increase in the cooling water temperature.

[0103] In a modified example of this embodiment, it is also possible to estimate a delay in changing the cam based on the pressure of the operation fluid for operating the cam instead of estimating the delay in changing the cam based on the temperature of the cooling water. Fig. 59 is a diagram illustrating a relationship between the delay in changing the cam and the hydraulic pressure. As shown in Fig. 59, it is estimated that the delay in changing the cam decreases with an increase in the hydraulic pressure.

[0104] In another embodiment of this embodiment, the delay in changing the cam is estimated in advance prior to changing the cam based on the operating condition or the hydraulic pressure, and the timing for changing the cam is determined by taking the delay into consideration. Fig. 60 is a diagram illustrating a relationship between a moment when an instruction is issued to change the cam and the moment at which the cam is actually changed. Referring to Fig. 60, a delay in changing the cam ($= \text{time } t_1 - \text{time } t_0$) is estimated and when it is attempted to change the cam at the time t_1 , an instruction to change the cam is issued at the time t_0 .

[0105] Fig. 61 is a flowchart illustrating a method of calculating a fuel injection amount according to the embodiment. This routine is executed at regular time intervals. When the routine starts as shown in Fig. 61, first, an output value of the air flow meter 19 is read at step 700. Then, at step 701, an engine rotational speed calculated based on the output value of the engine rotational speed sensor 17 is read. Then, an estimated cam selection value is read at step 702. That is, a flag rep-

resenting a cam selected at step 602 of Fig. 56 is read. Then, at step 703, an intake air amount per a revolution is calculated by the same method as the one of the above-mentioned embodiment. At step 704, a response correction coefficient is calculated based on the type of the cam, the engine rotational speed, the intake air amount per a revolution and a relationship shown in Fig. 62. Fig. 62 is one diagram illustrating the relationship among the response correction coefficient, type of the cam, engine rotational speed and intake air amount GN per one revolution. Then, at step 705, a fuel injection amount is calculated based on the intake air amount per a revolution and a relationship shown in Fig. 63. Fig. 63 is a diagram illustrating the relationship between the fuel injection amount and the intake air amount per a revolution.

[0106] Fig. 64 is a flowchart illustrating a routine for calculating an ignition timing according to the embodiment. This routine is executed at regular time intervals. When the routine starts as shown in Fig. 64, first, an intake air amount per one revolution is read at step 800. Then, at step 801, the engine rotational speed is read. Next, an estimated cam selection value is read at step 802. Thereafter, at step 803, an ignition timing is calculated based on the type of the cam, the engine rotational speed, the intake air amount per one revolution and a relationship shown in Fig. 65. Fig. 65 is a diagram illustrating the relationship among the ignition timing, type of the cam, engine rotational speed and intake air amount GN per one revolution.

[0107] In a modified example of the above embodiment, it is also possible, as required, to employ the intake and exhaust valves driven by the electromagnetic force or the hydraulic pressure instead of using the intake and exhaust valves driven by the cams.

[0108] According to the present invention as described above, the internal combustion engine can be controlled based not only upon the peak combustion pressure in the cylinder but also upon a pressure in the cylinder at a moment other than the peak combustion pressure. Namely, the internal combustion engine can be suitably controlled even when the opening areas or the working angles of the intake and exhaust valves are varied.

[0109] Further, the invention not only controls the internal combustion engine based simply on the cylinder wall temperature but also controls the internal combustion engine based on a correctly measured temperature of gas in the cylinder. The invention, further, makes it possible to suitably control the internal combustion engine even when the opening areas or the working angles of the intake and exhaust valves are varied.

[0110] According to the invention, further, the amount of the internal EGR gas is correctly calculated even when the opening areas or the working angles of the intake and exhaust valves are varied, and the internal combustion engine is suitably controlled based on the calculated amount of the internal EGR gas.

[0111] Lastly, according to the invention, the degree of turbulence in the cylinder is correctly estimated even when the opening areas of the intake valves are varied by the variable valve mechanism, and the internal combustion engine is suitably controlled based on the degree of turbulence in the cylinder.

Claims

1. A device for controlling an internal combustion engine based on a pressure in the cylinder, comprising a variable valve mechanism for varying opening areas of at least either the intake valves or the exhaust valves, wherein a pressure in the cylinder is calculated based on the opening area of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the pressure in the cylinder. 5
2. A device for controlling an internal combustion engine based on a pressure in the cylinder, comprising a variable valve mechanism for varying working angles of at least either the intake valves or the exhaust valves, wherein a pressure in the cylinder is calculated based on the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the pressure in the cylinder. 10
3. A device for controlling an internal combustion engine, comprising a variable valve mechanism for varying opening areas and working angles of at least either the intake valves or the exhaust valves, wherein a pressure in the cylinder is calculated based on the opening area and the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the pressure in the cylinder. 15
4. A device for controlling an internal combustion engine according to claim 3, wherein a pressure in the cylinder is calculated based on the phase of the intake valve, pressure in the intake pipe and engine rotational speed in addition to said opening area and said working angle, and the internal combustion engine is controlled based on the pressure in the cylinder. 20
5. A device for controlling an internal combustion engine according to claim 1, wherein a pressure in the cylinder is calculated based on the opening area of the intake valve, the calculated pressure in the cylinder increasing with an increase in the opening area of the intake valve. 25
6. A device for controlling an internal combustion engine according to claim 2, wherein a pressure in the cylinder is calculated based on the working angle of the intake valve, the calculated pressure in the cylinder increasing with an increase in the working angle of the intake valve when the intake valve is closed before the intake bottom dead center of the cylinder, and decreasing with an increase in the working angle of the intake valve when the intake valve is closed after the intake bottom dead center of the cylinder. 30
7. A device for controlling an internal combustion engine according to claim 3, wherein a pressure in the cylinder is calculated based on the opening area and the working angle of the intake valve, the calculated pressure in the cylinder increasing with an increase in the opening area of the intake valve, increasing with an increase in the working angle of the intake valve when the intake valve is closed before the intake bottom dead center of the cylinder, and decreasing with an increase in the working angle of the intake valve when the intake valve is closed after the intake bottom dead center of the cylinder. 35
8. A device for controlling an internal combustion engine according to any one of claims 1 to 7, wherein an ignition timing of the internal combustion engine is controlled based on the calculated pressure in the cylinder, the ignition timing delaying with an increase in the calculated pressure in the cylinder. 40
9. A device for controlling an internal combustion engine according to claim 4, wherein a pressure in the cylinder is calculated based on the opening area, working angle and phase of the intake valve, the calculated pressure in the cylinder increasing with an increase in the opening area of the intake valve, decreasing with an increase in the working angle of the intake valve, and increasing as the phase of the intake valve advances. 45
10. A device for controlling an internal combustion engine according to claim 9, wherein an amount of fuel injected into the internal combustion engine is controlled based on the calculated pressure in the cylinder, the amount of fuel injected increasing with an increase in the calculated pressure in the cylinder. 50
11. A device for controlling an internal combustion engine based on a temperature of a certain portion in the cylinder, comprising a variable valve mechanism for varying opening areas of at least either the intake valves or the exhaust valves, wherein a temperature of gas in the cylinder is calculated based on the opening area of at least either the intake valve or the exhaust valve varied by the variable 55

valve mechanism, and the internal combustion engine is controlled based on the temperature of gas in the cylinder.

12. A device for controlling an internal combustion engine based on a temperature of a certain portion in the cylinder, comprising a variable valve mechanism for varying working angles of at least either the intake valves or the exhaust valves, wherein a temperature of gas in the cylinder is calculated based on the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the temperature of gas in the cylinder. 5 10
13. A device for controlling an internal combustion engine, comprising a variable valve mechanism for varying opening areas and working angles of at least either the intake valves or the exhaust valves, wherein a temperature of gas in the cylinder is calculated based on the opening area and the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the temperature of gas in the cylinder. 15 20 25
14. A device for controlling an internal combustion engine according to claim 13, wherein a temperature of gas in the cylinder is calculated based on the phase of the intake valve, pressure in the intake pipe and engine rotational speed in addition to said opening area and said working angle, and the internal combustion engine is controlled based on the temperature of gas in the cylinder. 30 35
15. A device for controlling an internal combustion engine according to claim 11, wherein a temperature of gas in the cylinder is calculated based on the opening area of the intake valve, the calculated temperature of gas in the cylinder increasing with an increase in the opening area of the intake valve. 40
16. A device for controlling an internal combustion engine according to claim 12, wherein a temperature of gas in the cylinder is calculated based on the working angle of the intake valve, the calculated temperature of gas in the cylinder increasing with a decrease in the working angle of the intake valve when the intake valve is closed before the intake bottom dead center of the cylinder, and increasing with an increase in the working angle of the intake valve when the intake valve is closed after the intake bottom dead center of the cylinder. 45 50
17. A device for controlling an internal combustion engine according to claim 13, wherein a temperature of gas in the cylinder is calculated based on the 55

opening area and the working angle of the intake valve, the calculated temperature of gas in the cylinder increasing with an increase in the opening area of the intake valve, increasing with a decrease in the working angle of the intake valve when the intake valve is closed before the intake bottom dead center of the cylinder, and increasing with an increase in the working angle of the intake valve when the intake valve is closed after the intake bottom dead center of the cylinder.

18. A device for controlling an internal combustion engine according to any one of claims 11 to 17, wherein an ignition timing of the internal combustion engine is controlled based on the calculated temperature of gas in the cylinder, the ignition timing delaying with an increase in the calculated temperature of gas in the cylinder.
19. A device for controlling an internal combustion engine according to any one of claims 11 to 18, wherein a temperature of gas in the cylinder is corrected based on at least any one of the cylinder wall temperature, engine rotational speed, intake air amount, amount of the internal EGR gas or temperature of the internal EGR gas.
20. A device for controlling an internal combustion engine, comprising a variable valve mechanism for at least either the intake valves or the exhaust valves thereby to control the internal combustion engine based on a ratio or amount of the internal EGR gas, wherein a ratio or amount of the internal EGR gas is calculated based on the opening area of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the ratio or amount of the internal EGR gas.
21. A device for controlling an internal combustion engine, comprising a variable valve mechanism for at least either the intake valves or the exhaust valves thereby to control the internal combustion engine based on a ratio or amount of the internal EGR gas, wherein a ratio or amount of the internal EGR gas is calculated based on the working angle of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the ratio or amount of the internal EGR gas.
22. A device for controlling an internal combustion engine, wherein a ratio or amount of the internal EGR gas is calculated based on the opening areas and the working angles of at least either the intake valves or the exhaust valves varied by a variable valve mechanism, and the internal combustion engine is controlled based on the ratio or amount of

the internal EGR gas.

23. A device for controlling an internal combustion engine according to claim 22, wherein a ratio or amount of the internal EGR gas is calculated based on the phase of the intake valve, pressure in the intake pipe and engine rotational speed in addition to said opening area and said working angle, and the internal combustion engine is controlled based on the ratio or amount of the internal EGR gas.
24. A device for controlling an internal combustion engine according to claim 20, wherein a ratio or amount of the internal EGR gas is calculated based on the opening area of the intake valve, the calculated ratio or amount of the internal EGR gas increasing with an increase in the opening area of the intake valve.
25. A device for controlling an internal combustion engine according to claim 21, wherein a ratio or amount of the internal EGR gas is calculated based on the working angle of the intake valve, the calculated ratio or amount of the internal EGR gas increasing with an increase in the working angle of the intake valve.
26. A device for controlling an internal combustion engine according to claim 22, wherein a ratio or amount of the internal EGR gas is calculated based on the opening area and the working angle of the intake valve, the calculated ratio or amount of the internal EGR gas increasing with an increase in the opening area of the intake valve, and increasing with an increase in the working angle of the intake valve.
27. A device for controlling an internal combustion engine according to any one of claims 20 to 26, wherein a ratio or amount of the internal EGR gas is corrected based on at least any one of the atmospheric pressure, pressure in the exhaust pipe, or ratio or amount of the internal EGR gas calculated in the previous time.
28. A device for controlling an internal combustion engine according to claim 20, wherein a ratio or amount of the internal EGR gas is calculated based upon the opening area of at least either the intake valve or the exhaust valve varied by the variable valve mechanism, upon the pressure upstream of the intake valve and upon the pressure downstream thereof during the valve overlapping period, and the internal combustion engine is controlled based on the ratio or amount of the internal EGR gas.
29. A device for controlling an internal combustion engine according to claim 28, wherein a ratio or

amount of the internal EGR gas is calculated based upon the opening area of the intake valve, upon the pressure upstream of the intake valve and upon the pressure downstream thereof during the valve overlapping period, the calculated ratio or amount of the internal EGR gas increasing with an increase in the opening area of the intake valve, and increasing with an increase in the difference between the pressure downstream of the intake valve and the pressure upstream thereof during the valve overlapping period.

30. A device for controlling an internal combustion engine according to claim 28 or 29, wherein an instantaneous ratio or amount of the internal EGR gas is calculated based upon the opening area of at least either the intake valve or the exhaust valve varied by the variable valve mechanism at regular intervals, upon the pressure upstream of the intake valve and upon the pressure downstream thereof at regular intervals during the valve overlapping period, and the internal combustion engine is controlled based on the ratio or amount of the internal EGR gas obtained by integrating the instantaneous ratios or amounts of the internal EGR gas.
31. A device for controlling an internal combustion engine according to any one of claims 20 to 30, wherein an ignition timing of the internal combustion engine is controlled based on the calculated ratio or amount of the internal EGR gas, the ignition timing advancing with an increase in the calculated ratio or amount of the internal EGR gas.
32. A device for controlling an internal combustion engine, comprising a variable valve mechanism for at least either the intake valves or the exhaust valves thereby to control the internal combustion engine based on a degree of turbulence in the cylinder that is estimated based on the opening area of the intake valve varied by the variable valve mechanism, wherein it is so estimated that the degree of turbulence in the cylinder increases with a decrease in the opening area of the intake valve varied by the variable valve mechanism, and the internal combustion engine is controlled based on the estimated degree of turbulence in the cylinder.
33. A device for controlling an internal combustion engine according to claim 32, wherein a degree of turbulence in the cylinder is estimated based upon the working angle of the intake valve, phase of the intake valve, pressure in the intake pipe and engine rotational speed in addition to said opening area, and the internal combustion engine is controlled based upon the estimated degree of turbulence in the cylinder.

34. A device for controlling an internal combustion engine according to claim 32 or 33, wherein it is so estimated that the degree of turbulence in the cylinder increases with a decrease in the working angle of the intake valve, and the internal combustion engine is controlled based on the estimated degree of turbulence in the cylinder. 5
35. A device for controlling an internal combustion engine according to any one of claims 32 to 34, wherein an ignition timing of the internal combustion engine is controlled based upon the estimated degree of turbulence in the cylinder, and the ignition timing delays with an increase in the estimated degree of turbulence in the cylinder. 10 15

20

25

30

35

40

45

50

55

Fig.1

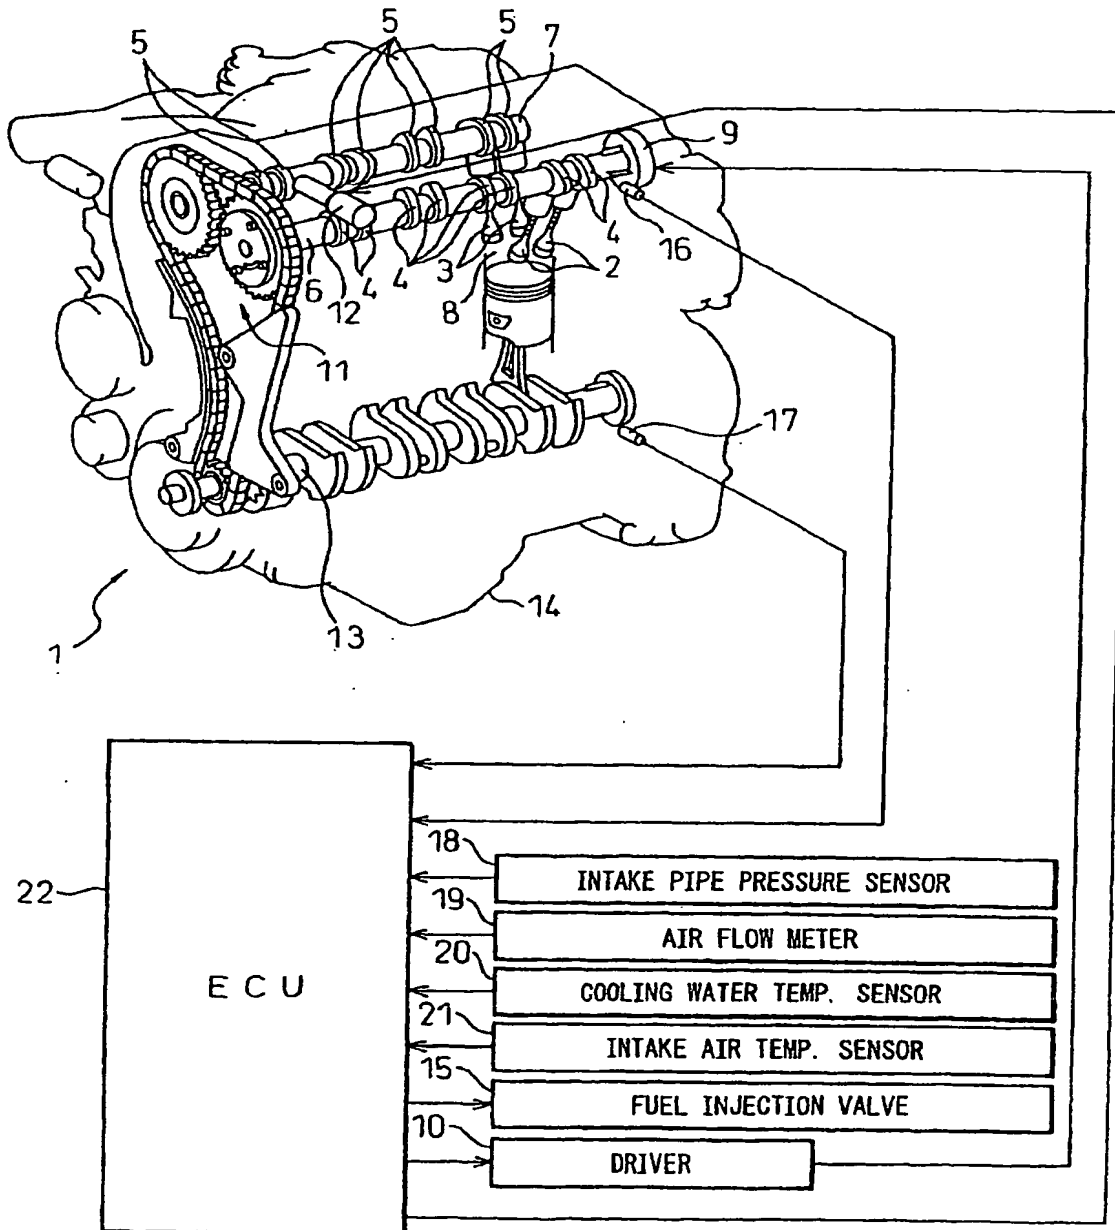


Fig. 2

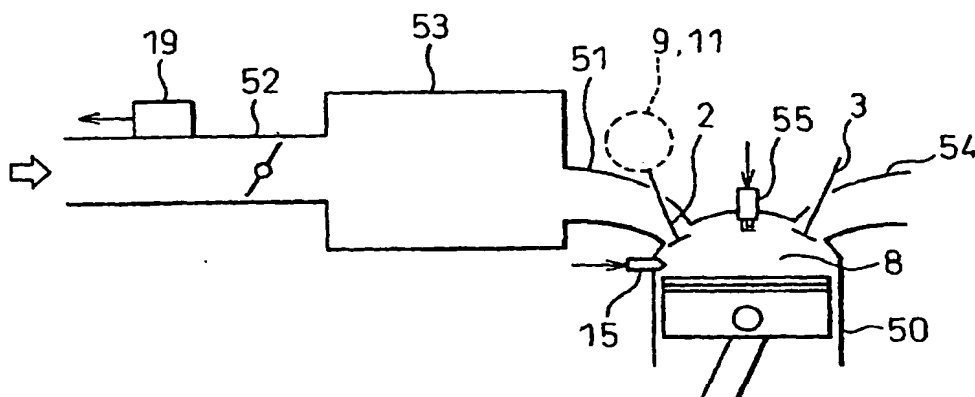


Fig. 3

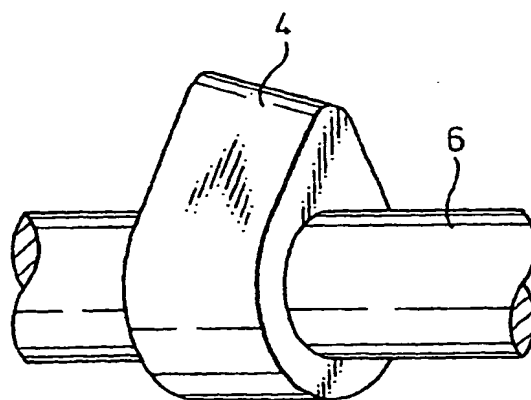


Fig.4

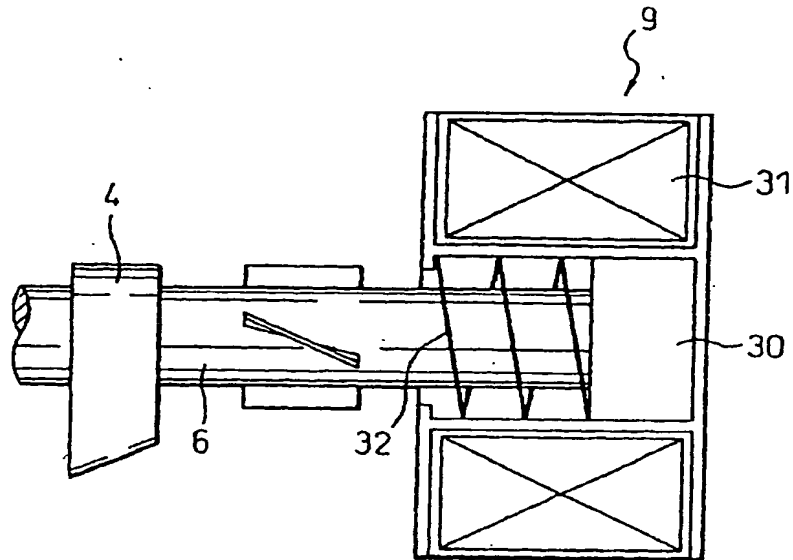


Fig.5

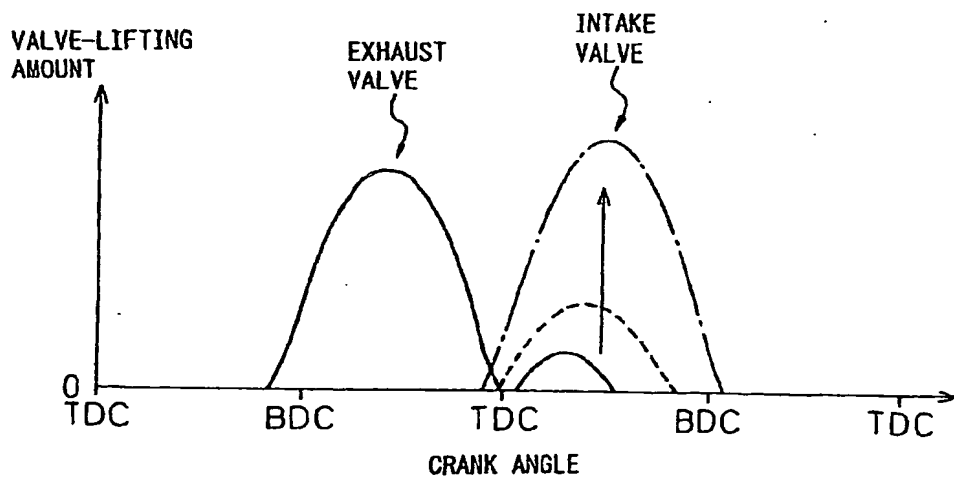


Fig.6

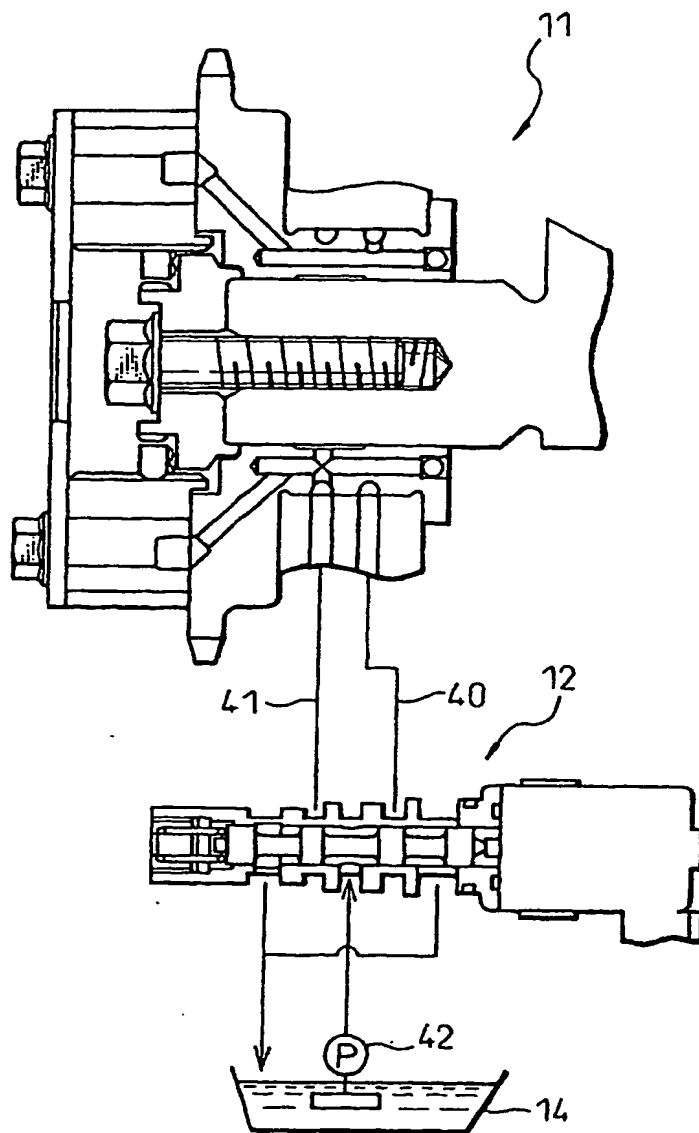


Fig.7

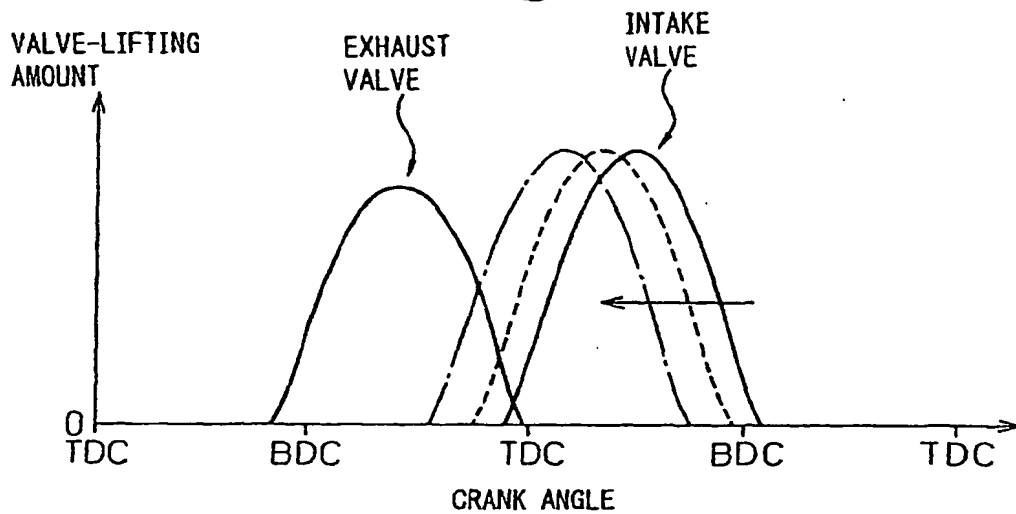


Fig.8


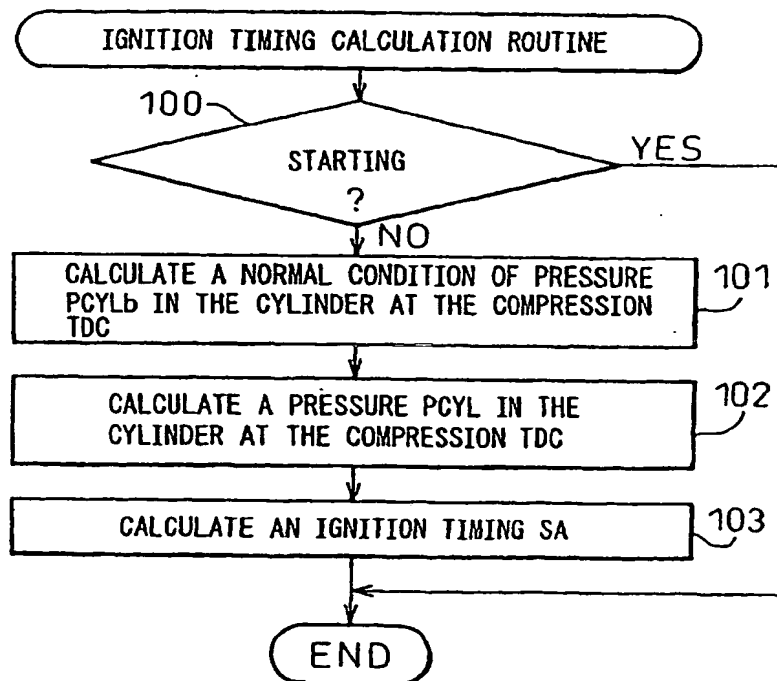


Fig.9

NORMAL CONDITION OF
PRESSURE IN THE CYLINDER
AT THE COMPRESSION TDC

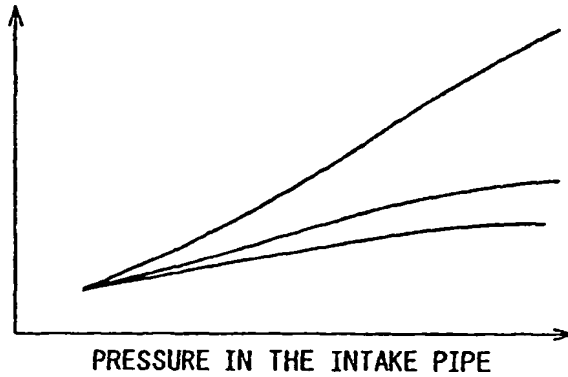


LARGE VALVE-
LIFTING AMOUNT
SMALL VALVE-
LIFTING AMOUNT

Fig.10

NORMAL CONDITION OF
PRESSURE IN THE CYLINDER
AT THE COMPRESSION TDC

WHEN THE INTAKE VALVE
IS FULLY CLOSED AFTER
THE BDC

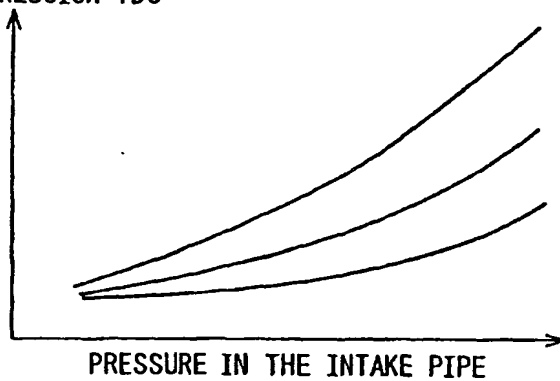

SMALL WORKING
ANGLE
LARGE WORKING
ANGLE

Fig.11

NORMAL CONDITION OF
PRESSURE IN THE CYLINDER
AT THE COMPRESSION TDC

WHEN THE INTAKE VALVE
IS FULLY CLOSED BEFORE
THE BDC

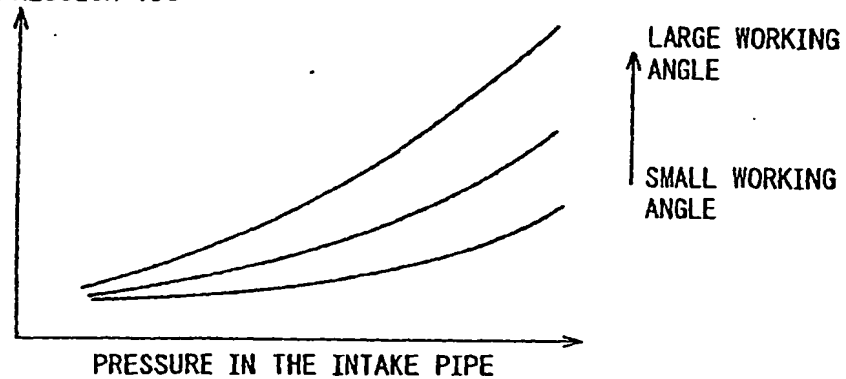


Fig.12

NORMAL CONDITION OF
PRESSURE IN THE CYLINDER
AT THE COMPRESSION TDC

WHEN THE INTAKE VALVE
IS FULLY CLOSED AFTER
THE BDC

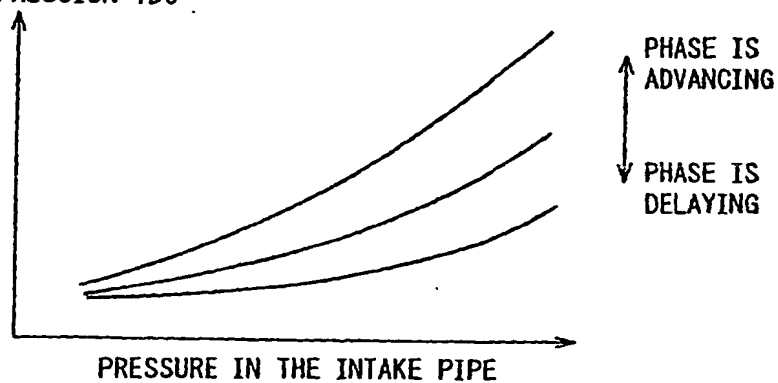


Fig.13

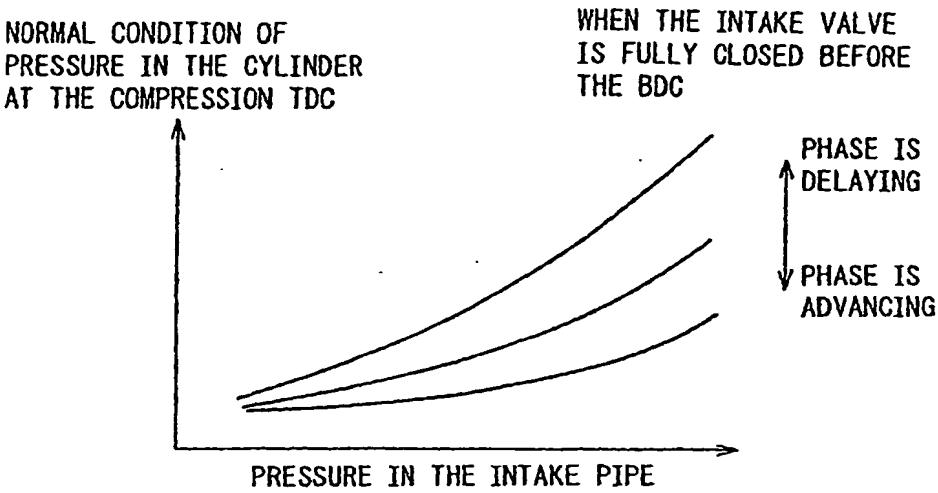


Fig.14

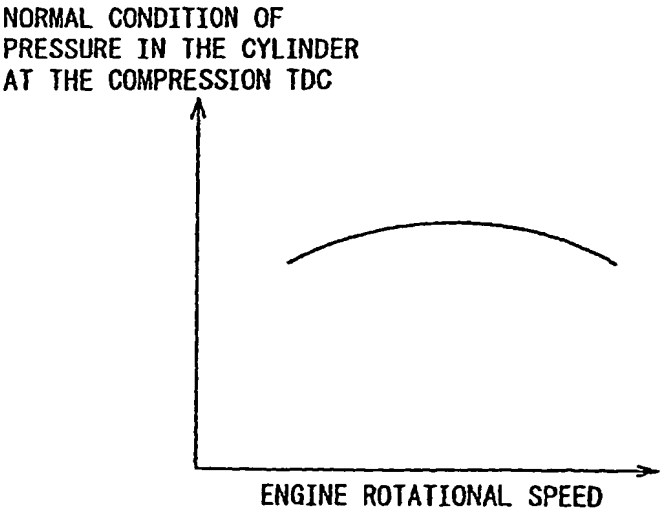


Fig.15

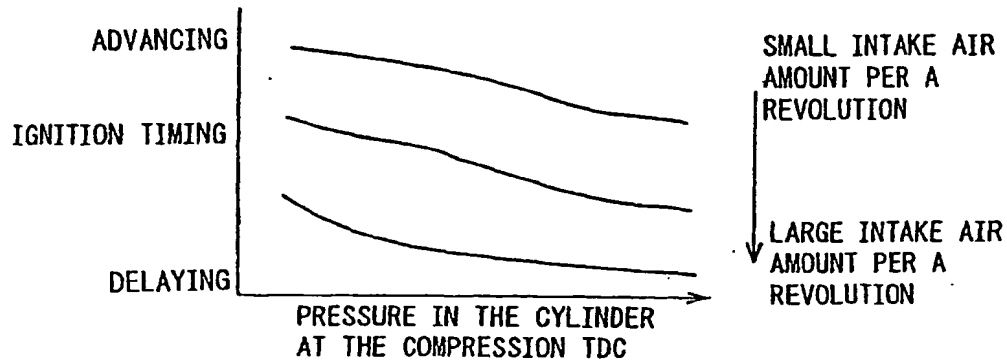


Fig.16

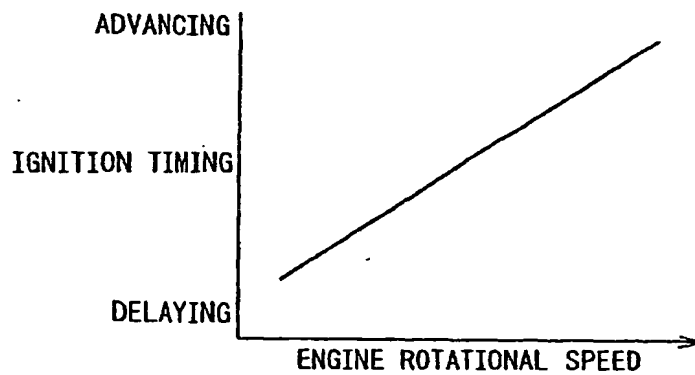


Fig.17

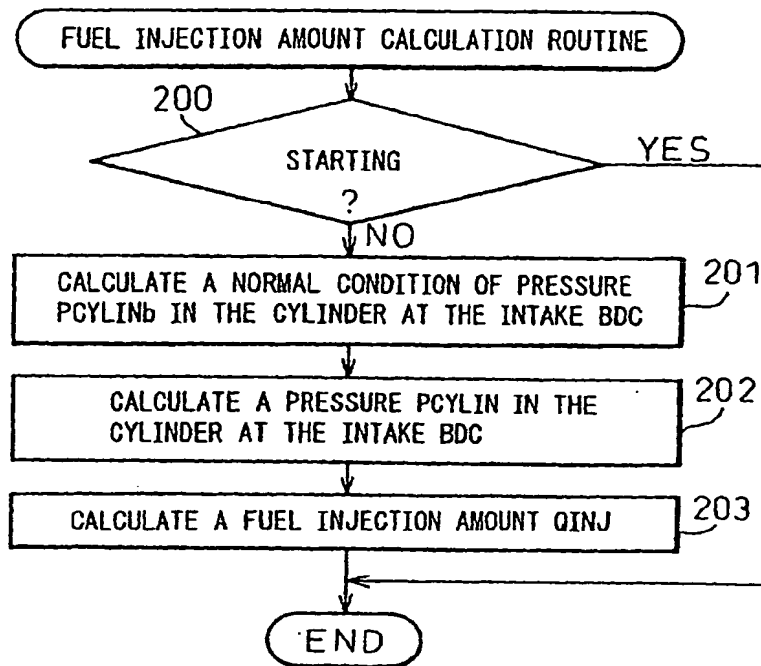


Fig.18

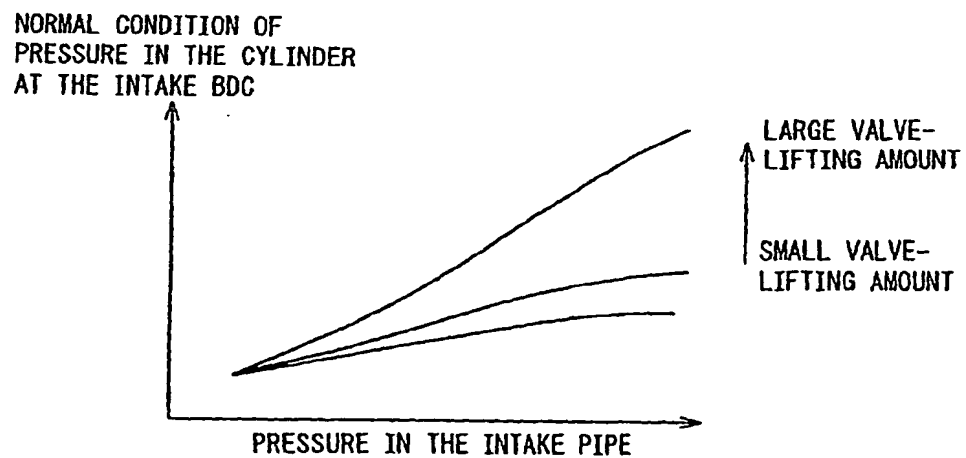


Fig.19

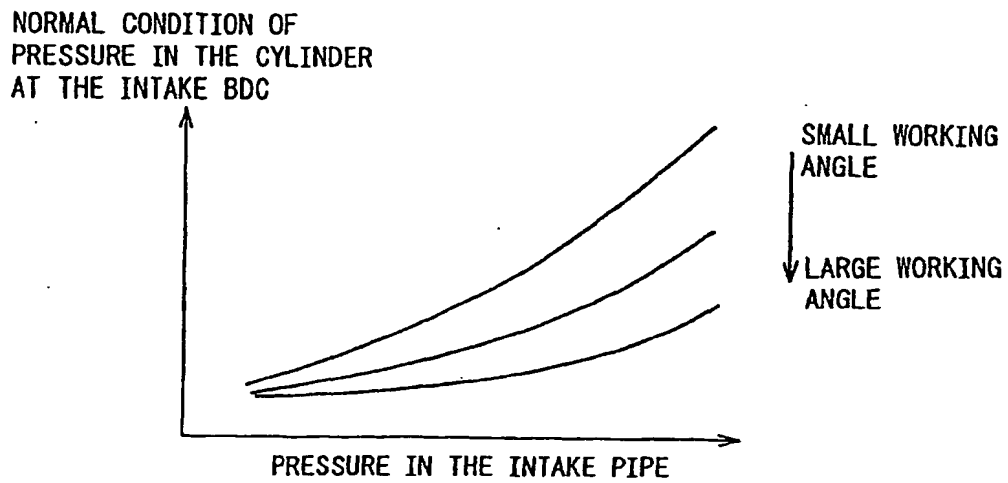


Fig.20

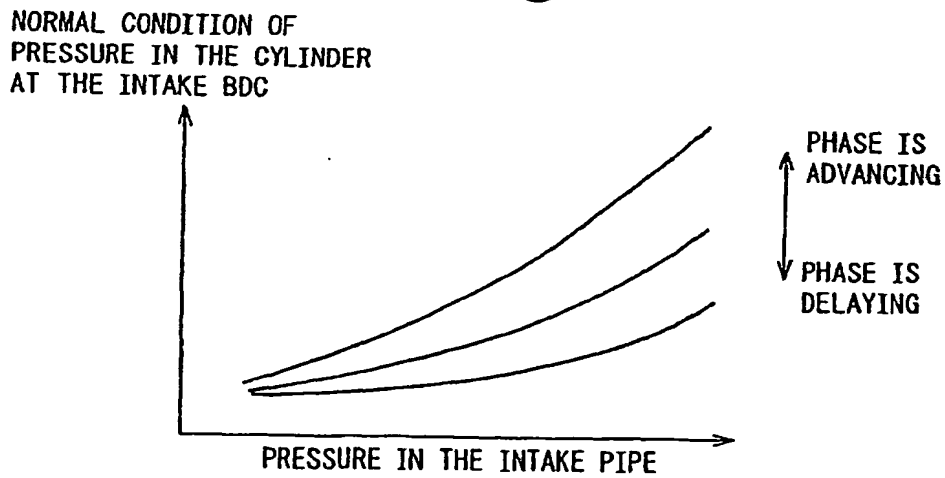


Fig.21

NORMAL CONDITION OF
PRESSURE IN THE CYLINDER
AT THE INTAKE BDC

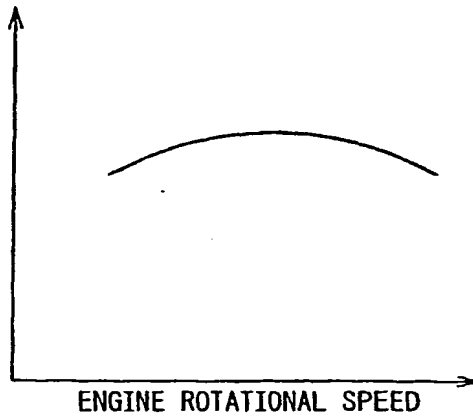


Fig.22

AMOUNT OF
FUEL INJECTION

LARGE

SMALL

PRESSURE IN THE CYLINDER
AT THE INTAKE BDC

SMALL VALVE OVERLAPPING=
PHASE OF INTAKE VALVE IS
DELAYING

PHASE OF INTAKE VALVE IS
ADVANCING=LARGE VALVE
OVERLAPPING

Fig.23

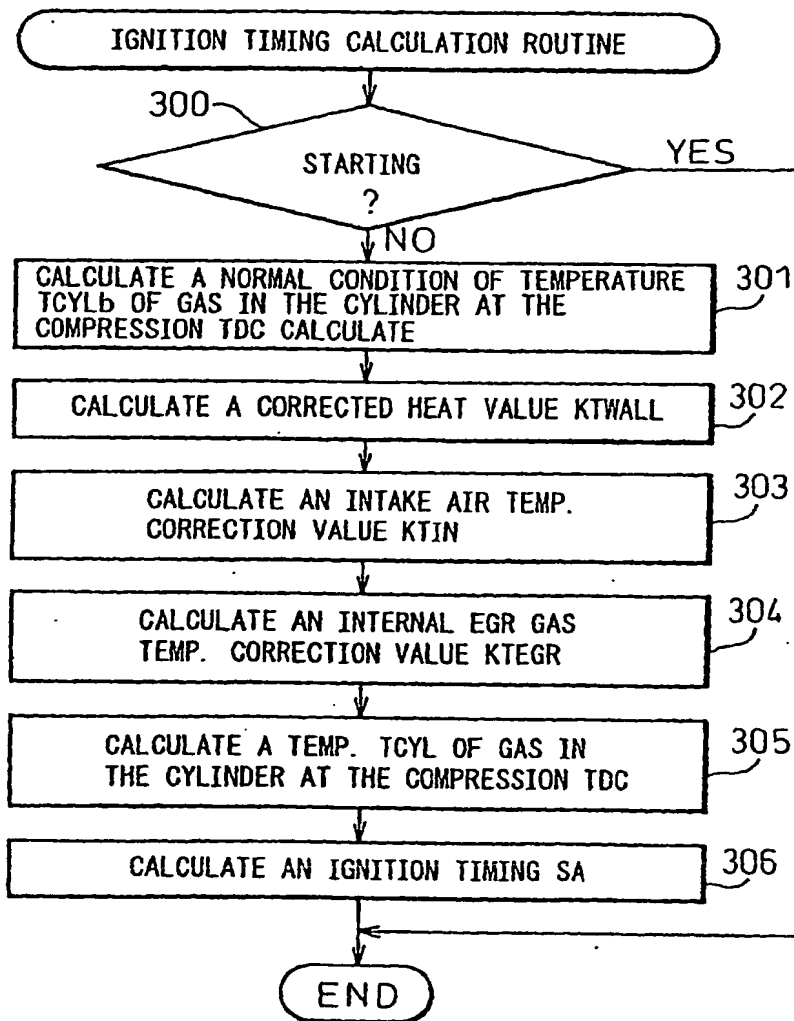


Fig.24

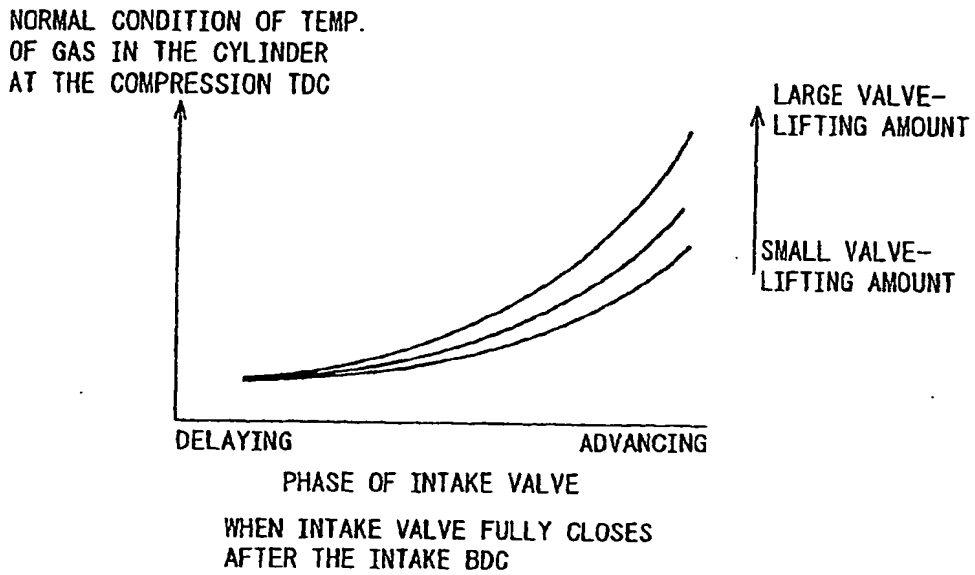


Fig.25

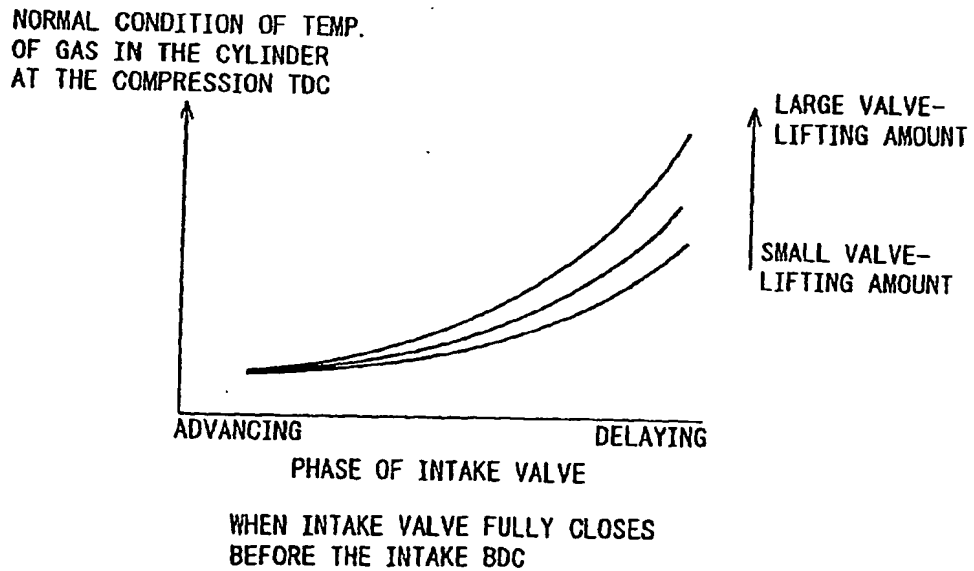


Fig.26

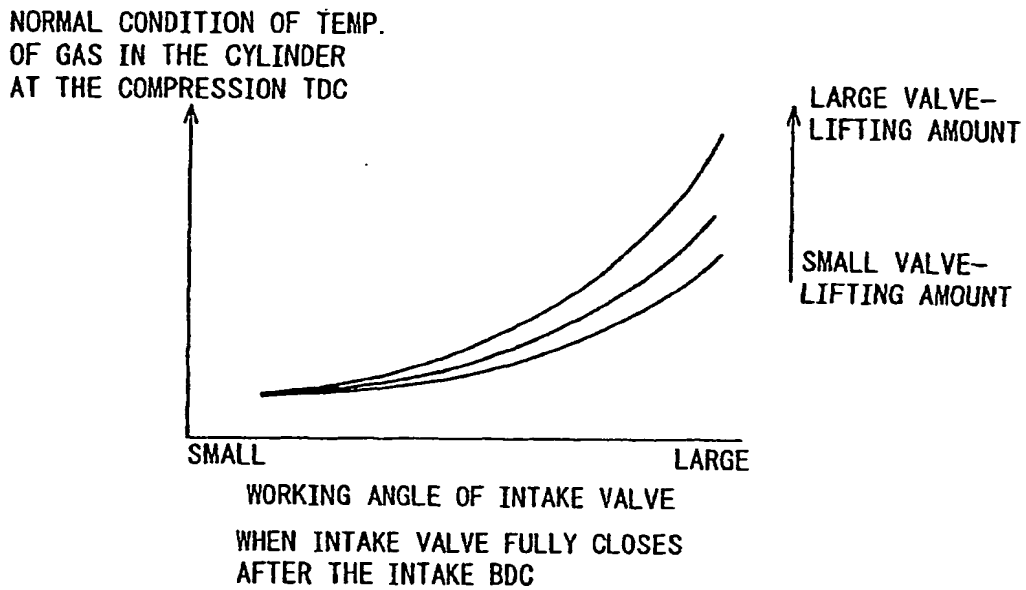


Fig.27

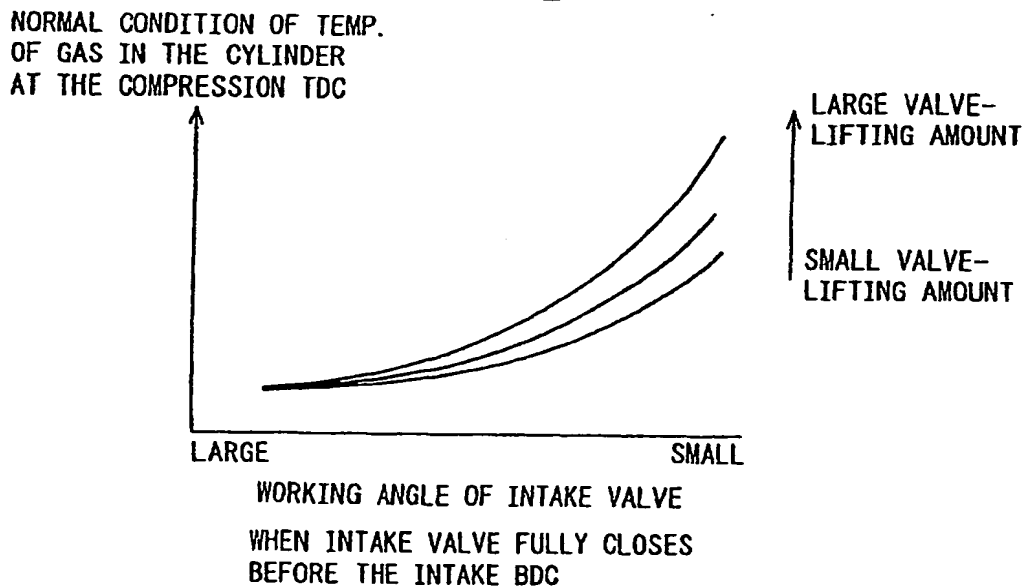


Fig.28

NORMAL CONDITION OF TEMP.
OF GAS IN THE CYLINDER
AT THE COMPRESSION TDC

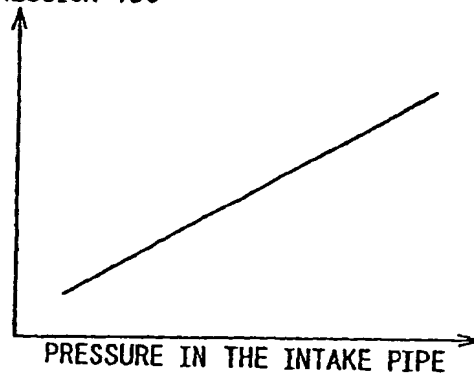


Fig.29

NORMAL CONDITION OF TEMP.
OF GAS IN THE CYLINDER
AT THE COMPRESSION TDC

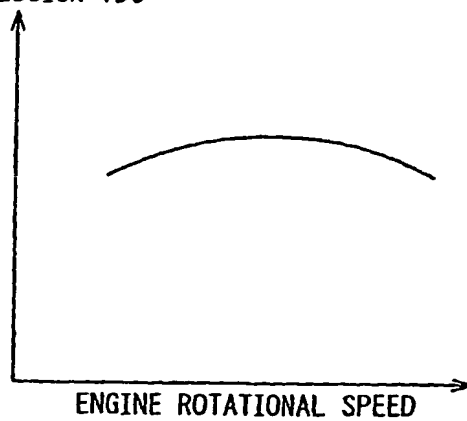


Fig.30

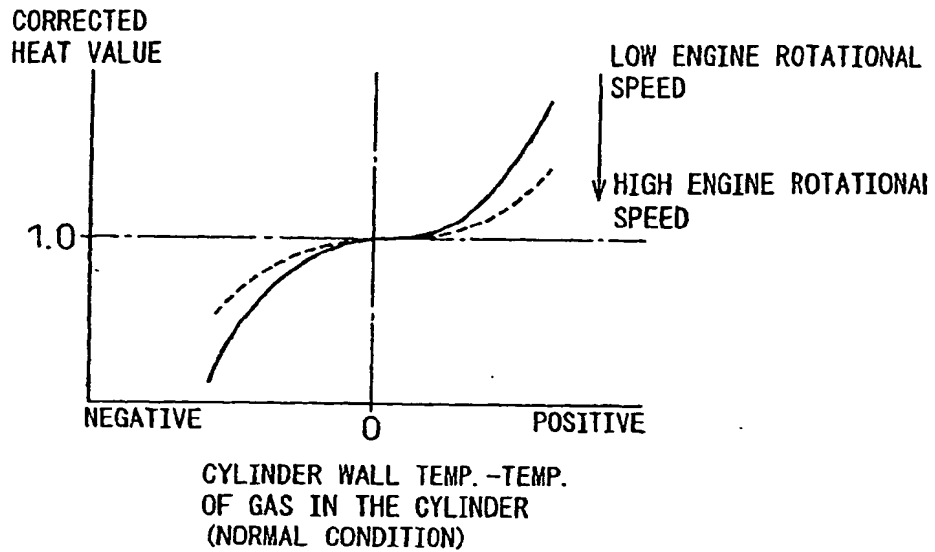


Fig.31

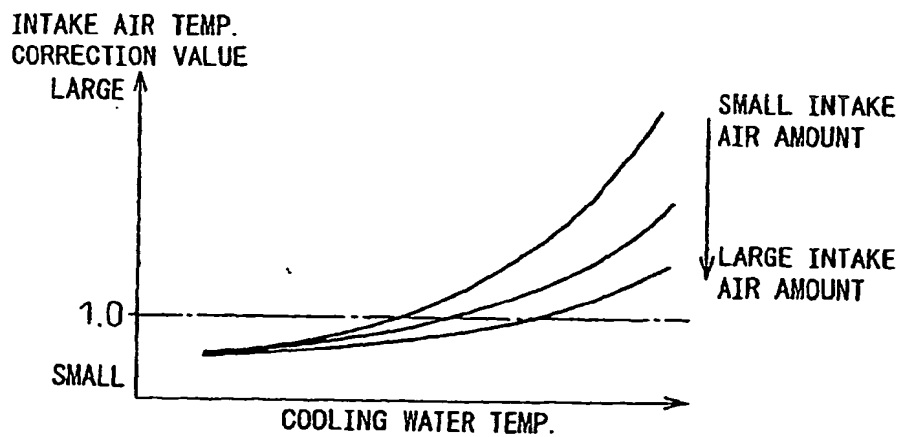


Fig.32

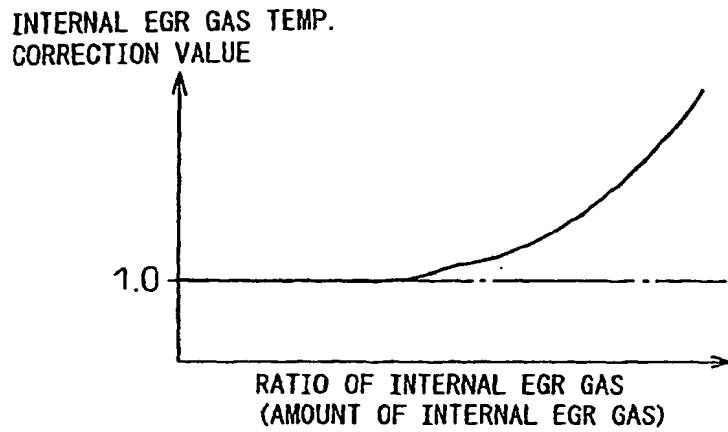


Fig.33

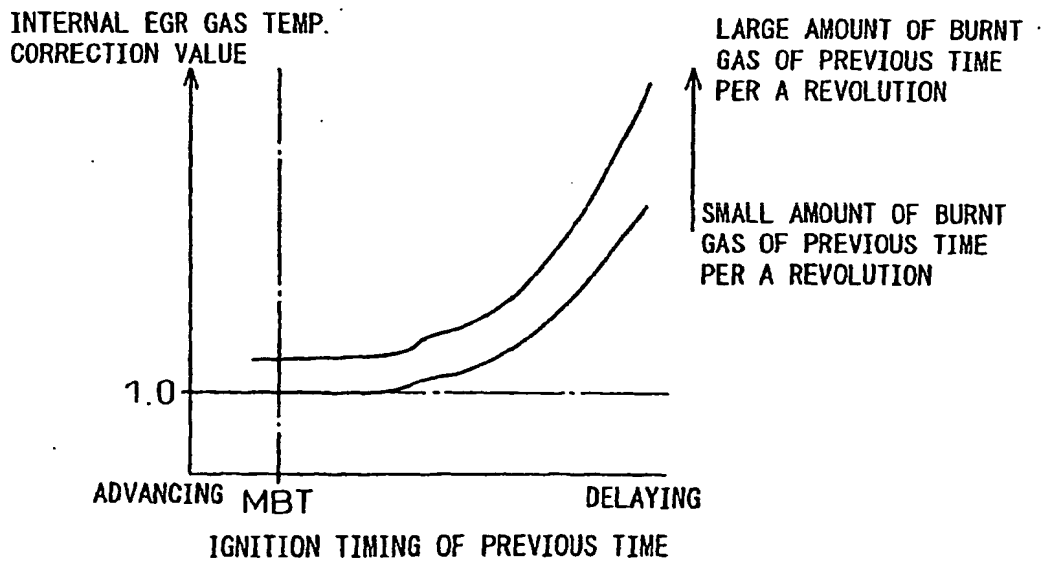


Fig.34

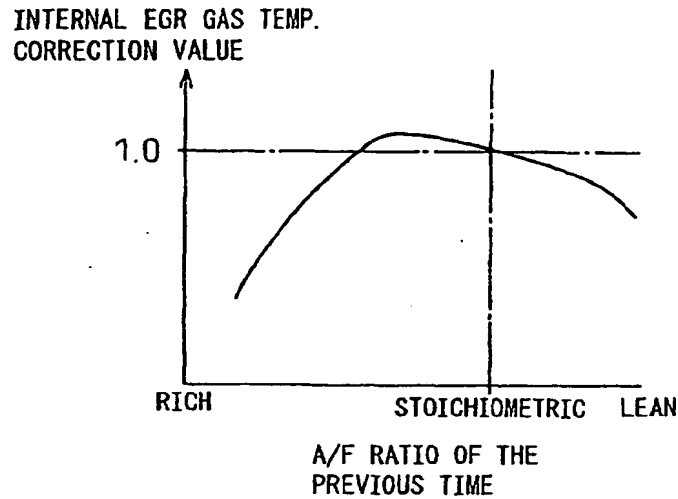


Fig.35

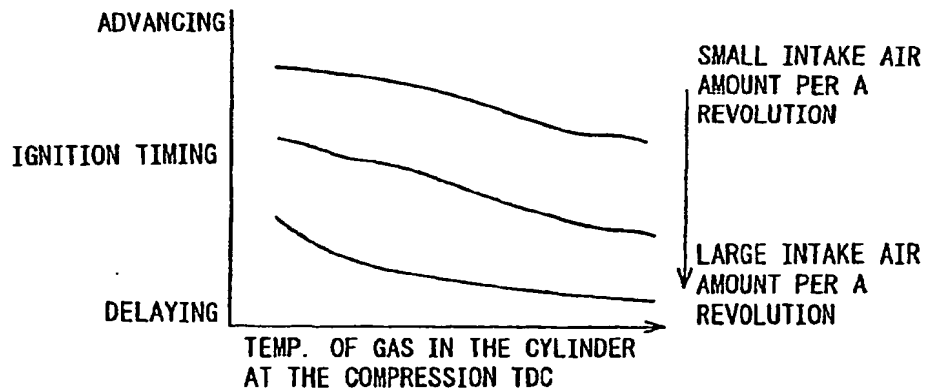


Fig.36

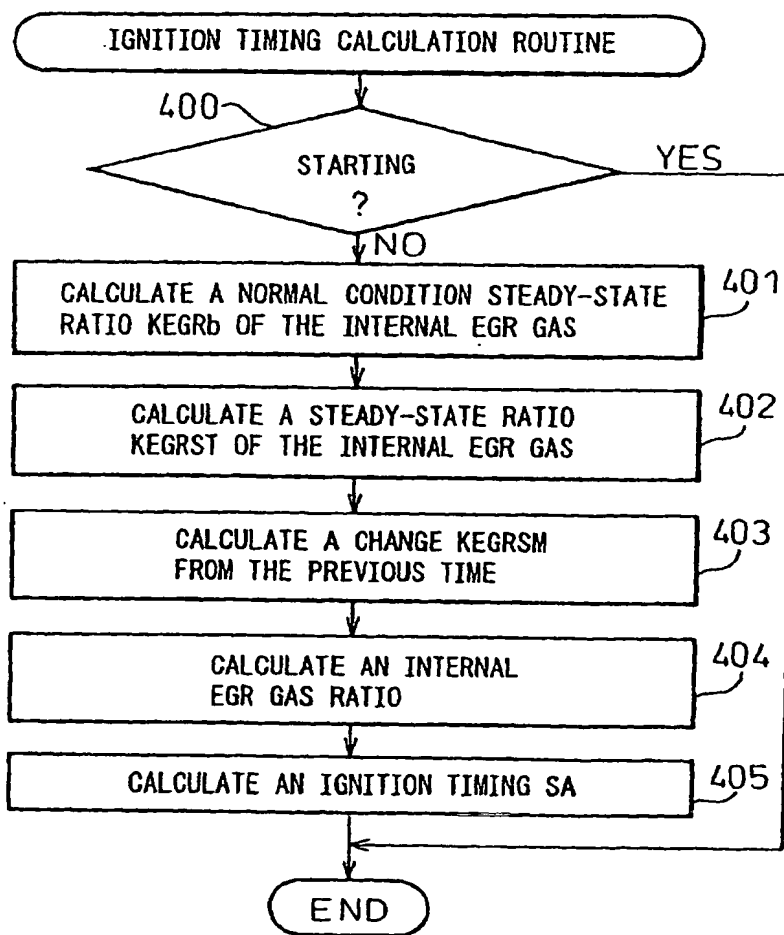


Fig.37

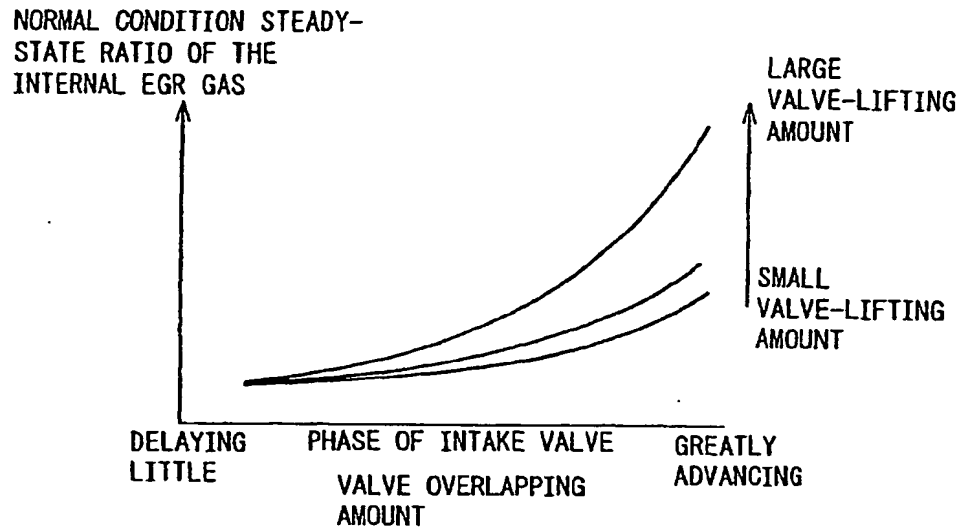


Fig.38

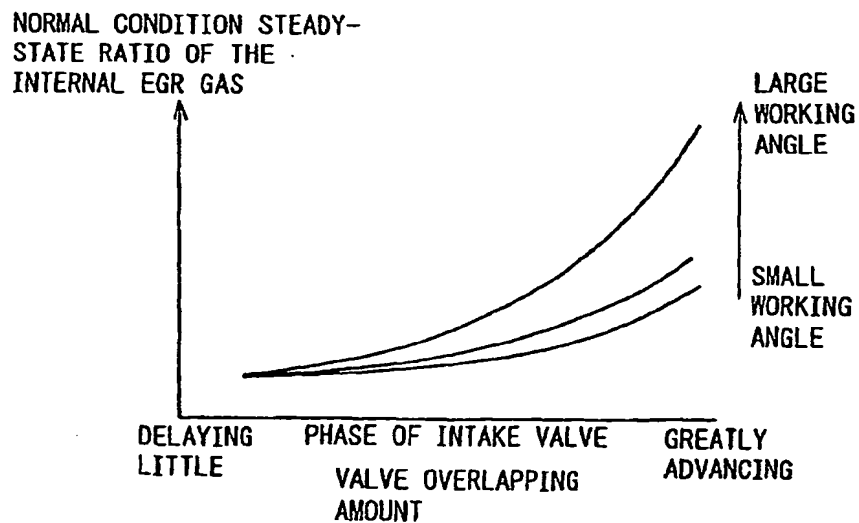


Fig.39

NORMAL CONDITION STEADY-
STATE RATIO OF THE
INTERNAL EGR GAS

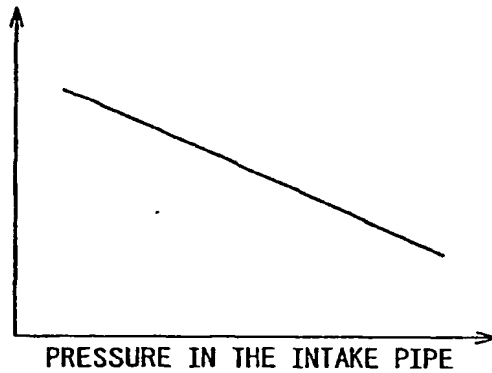


Fig.40

NORMAL CONDITION STEADY-
STATE RATIO OF THE
INTERNAL EGR GAS

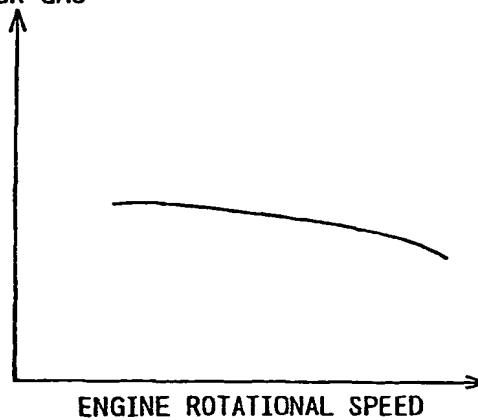


Fig.41

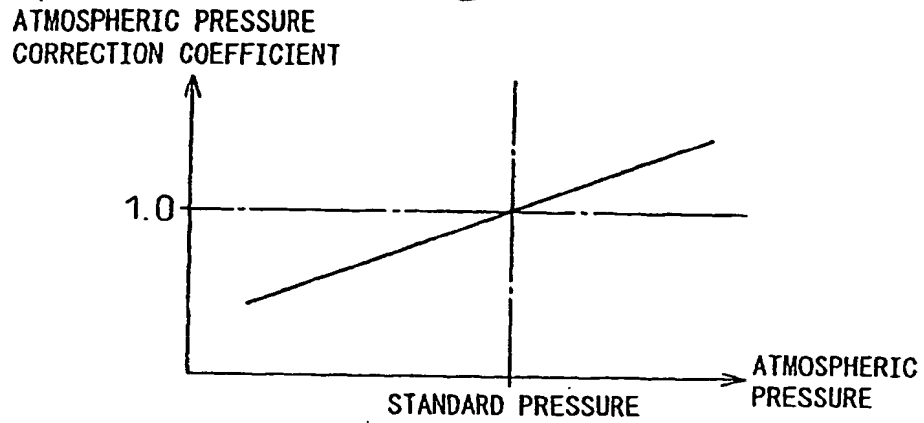


Fig.42

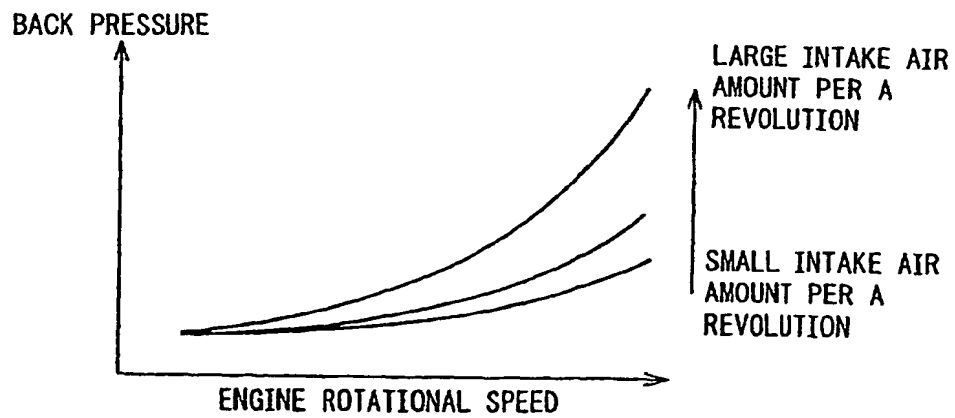


Fig.43

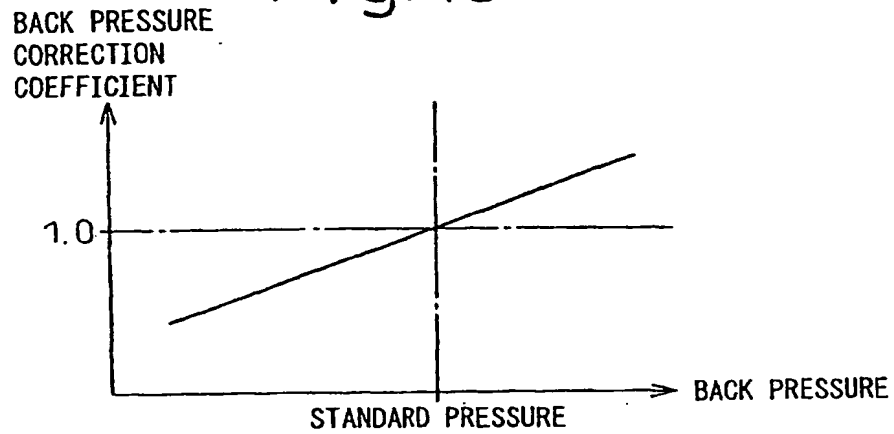


Fig.44

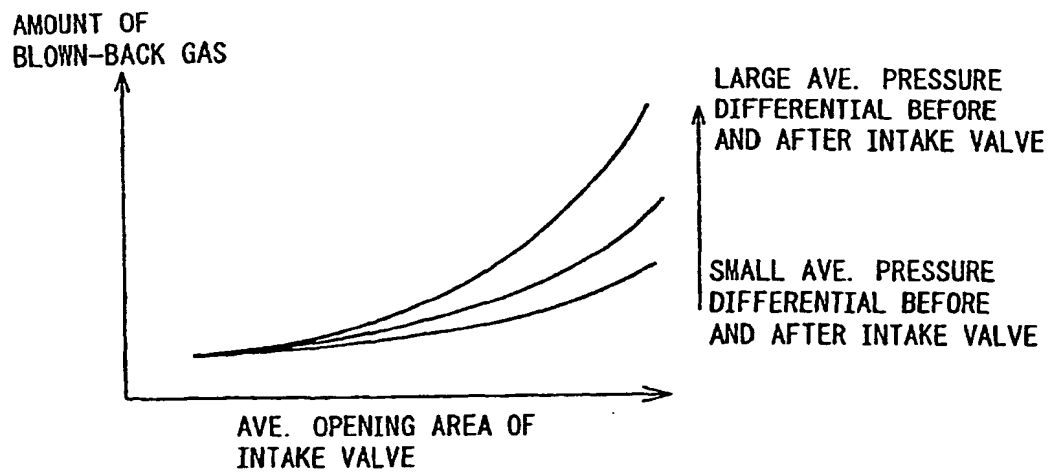


Fig.45

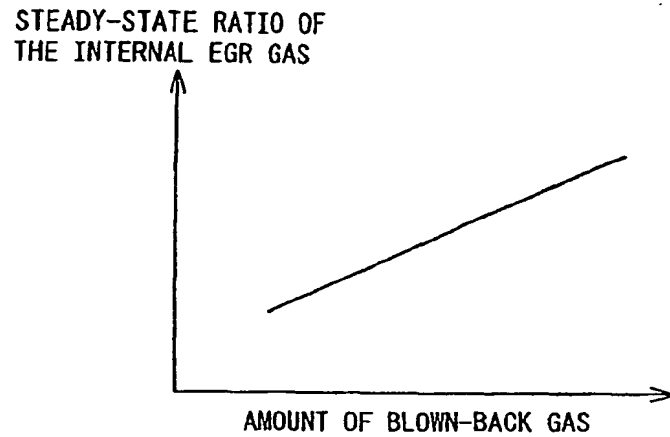


Fig.46

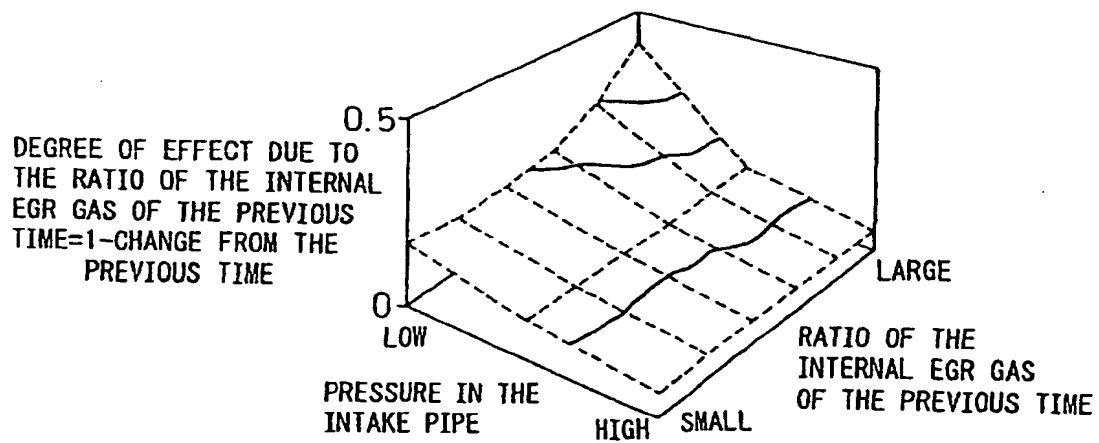


Fig.47

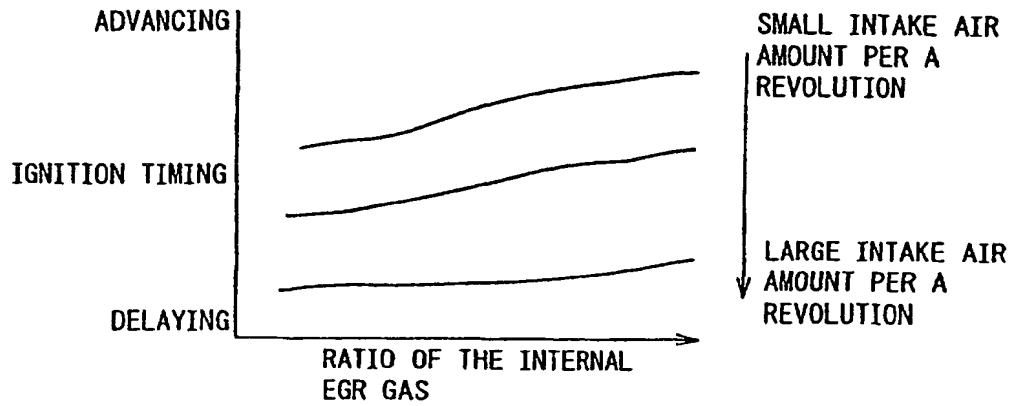


Fig.48

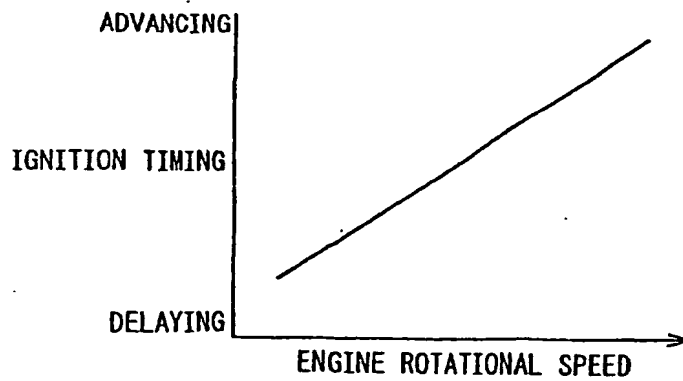


Fig.49

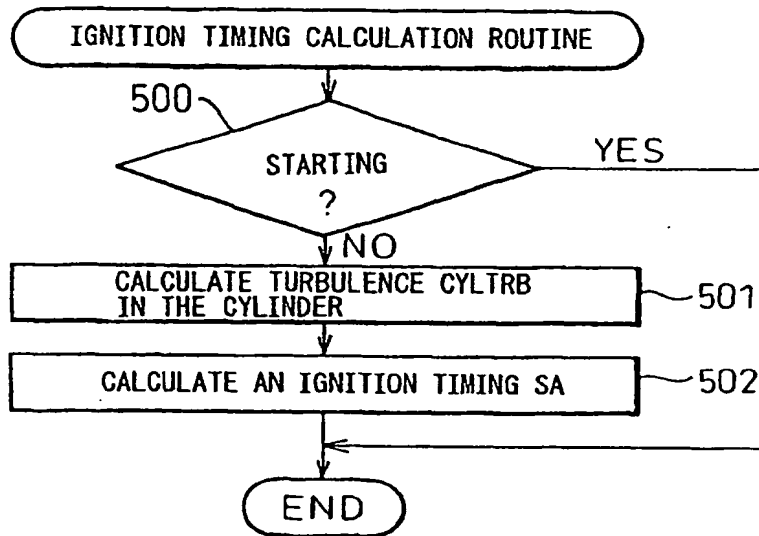


Fig.50

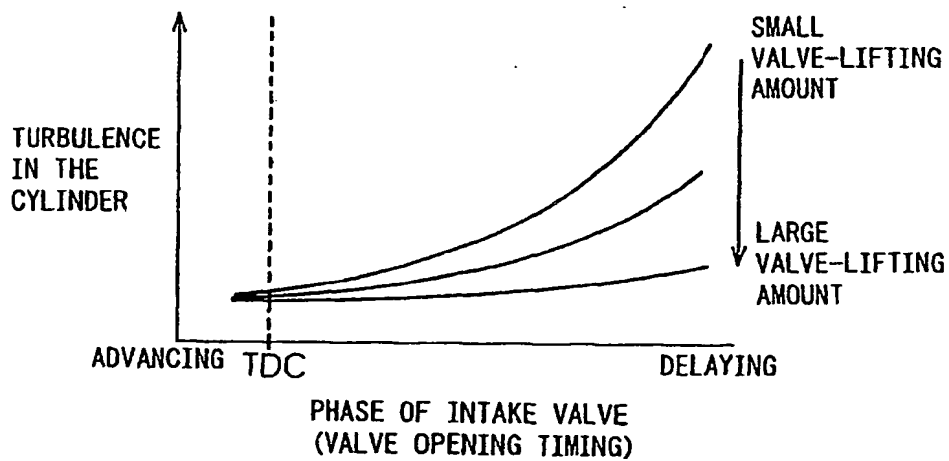


Fig.51

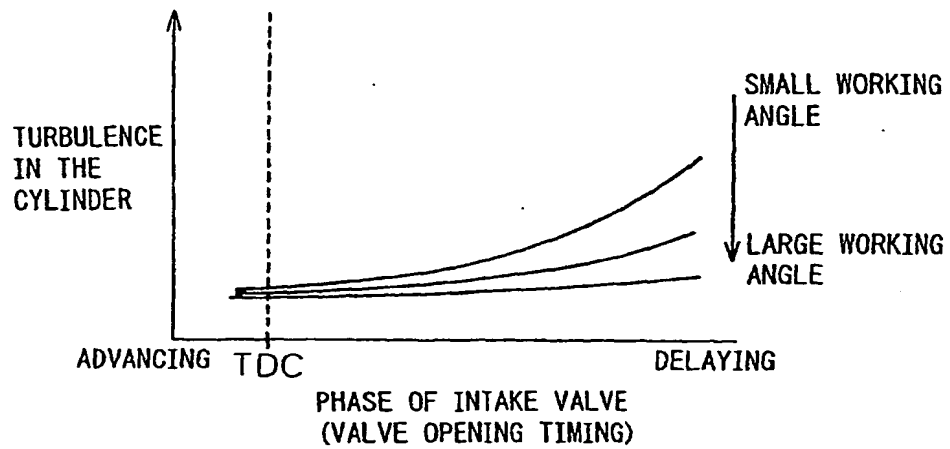


Fig.52

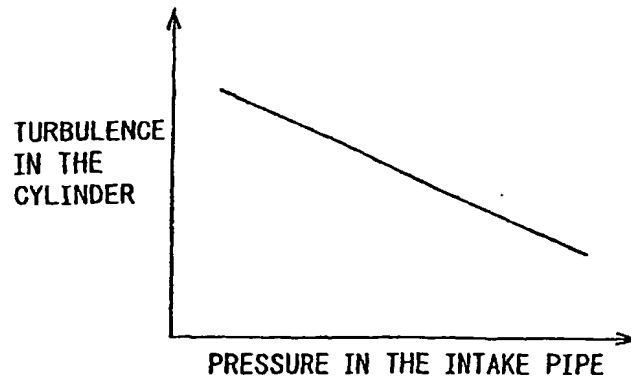


Fig.53

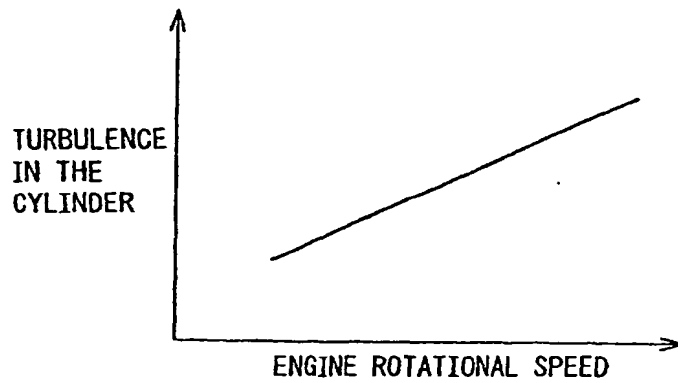


Fig.54

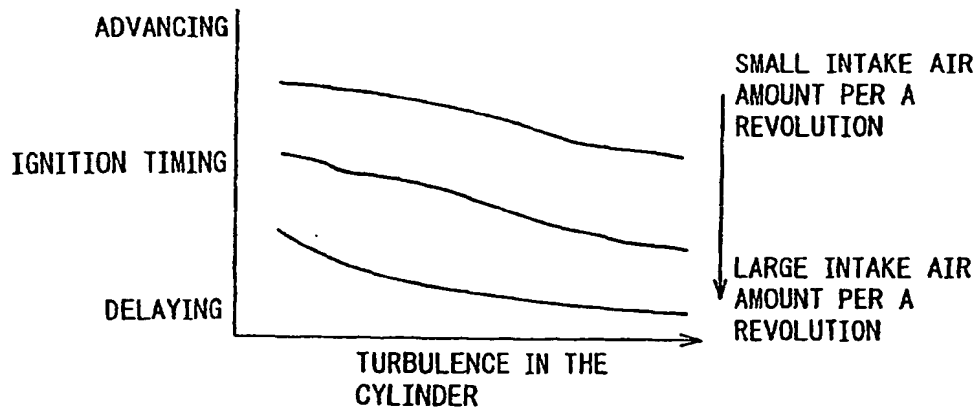


Fig.55

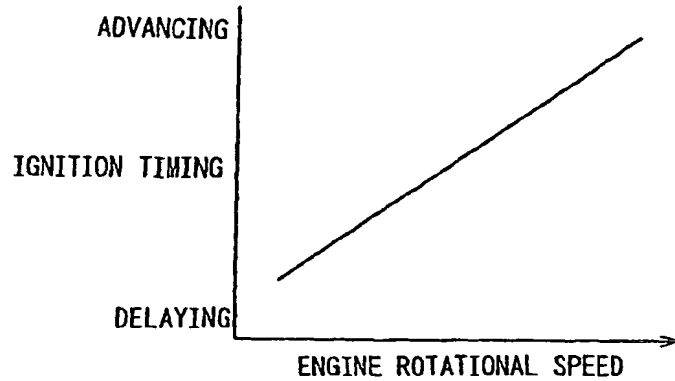


Fig.56

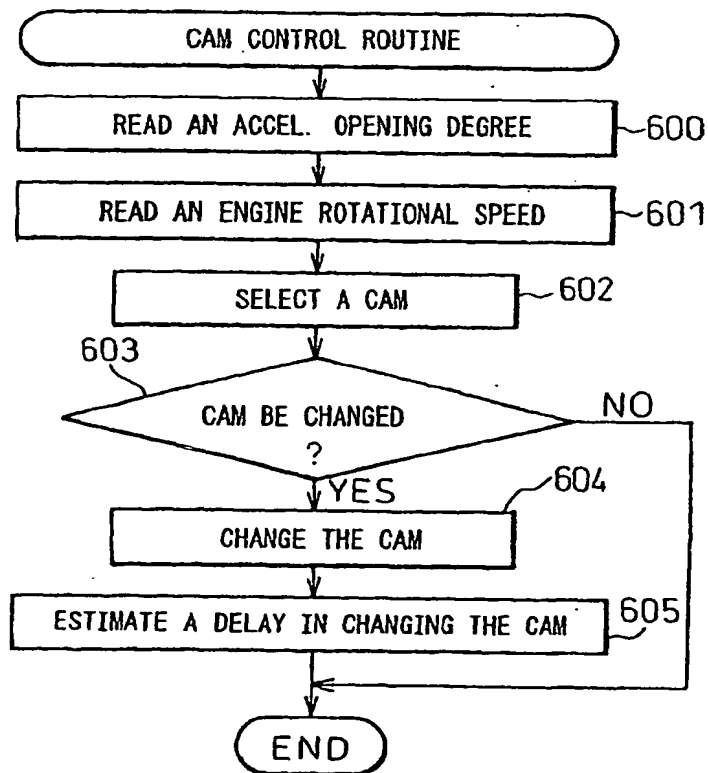


Fig.57

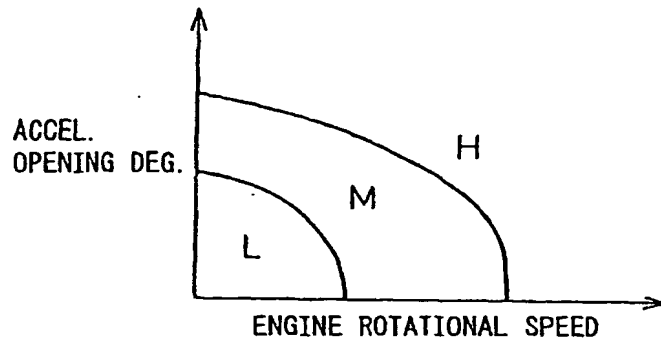


Fig.58

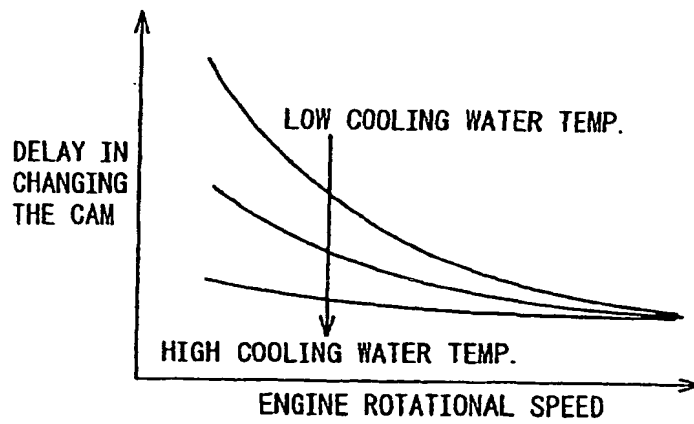


Fig.59

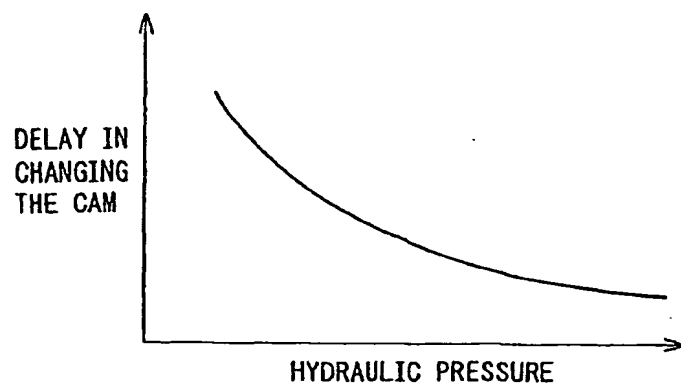


Fig.60

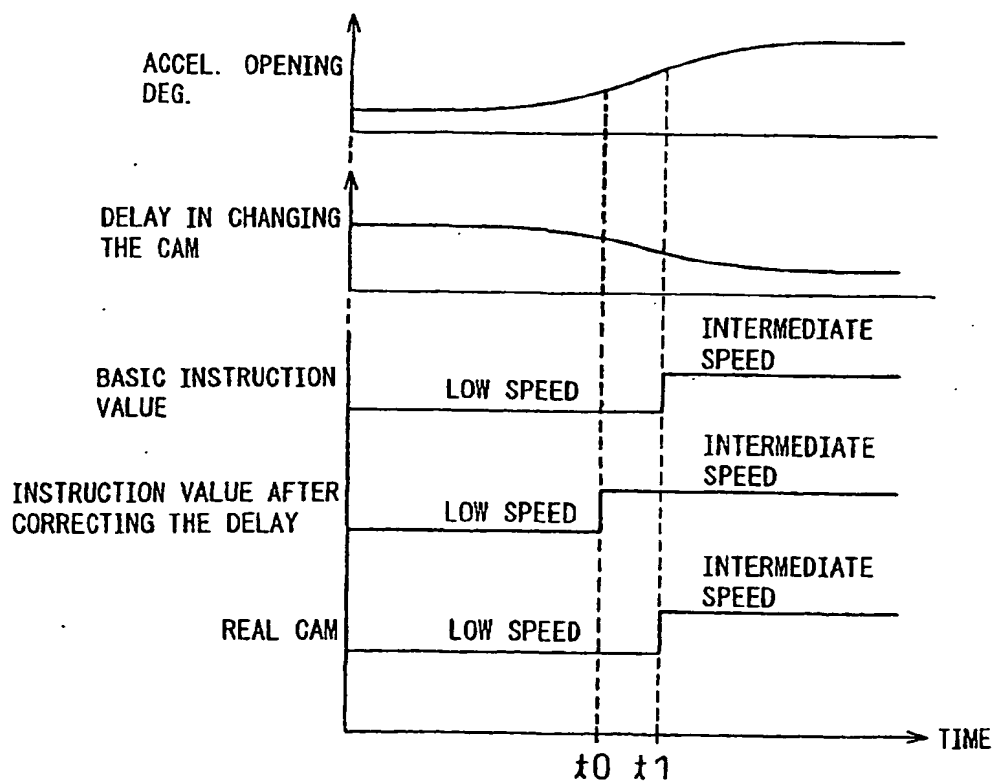


Fig.61

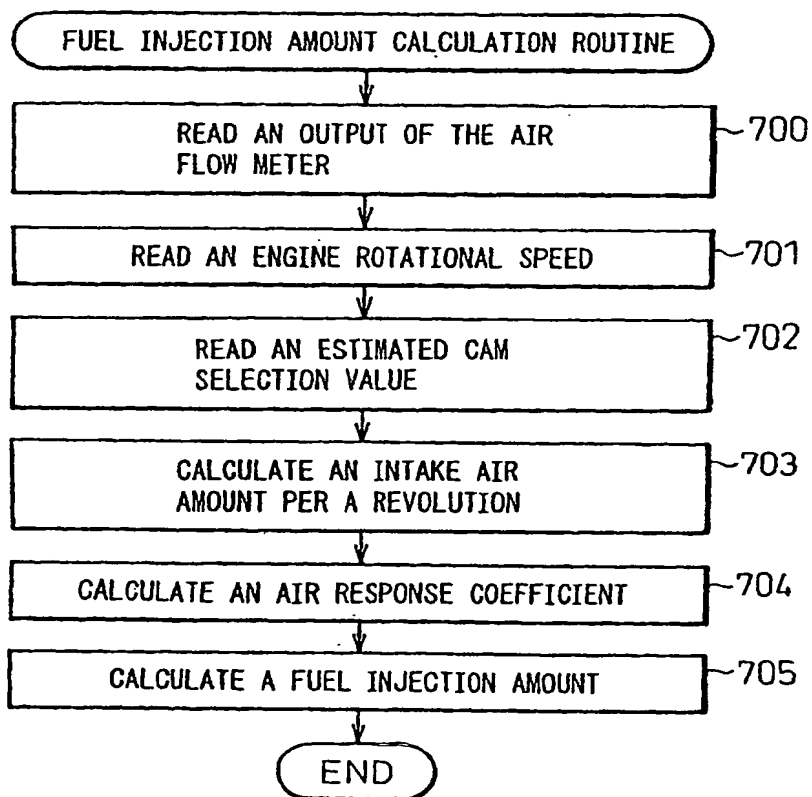


Fig.62

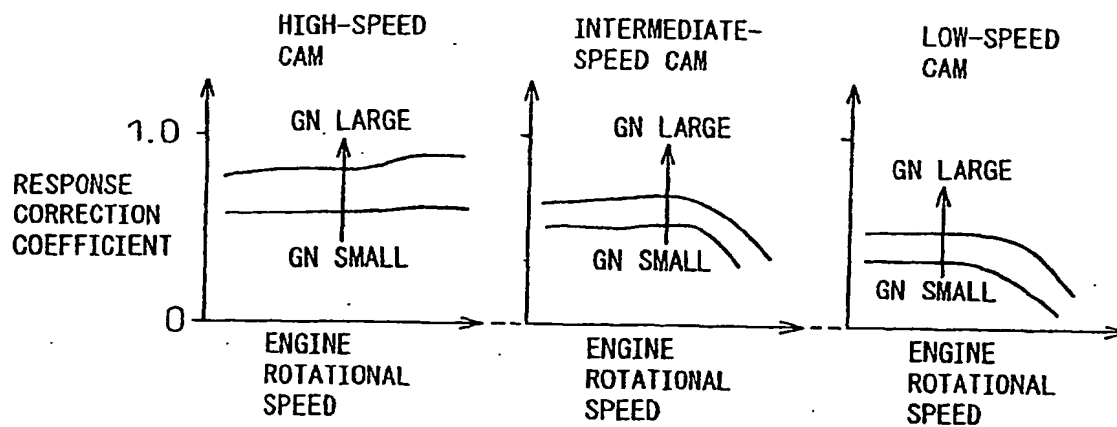


Fig.63

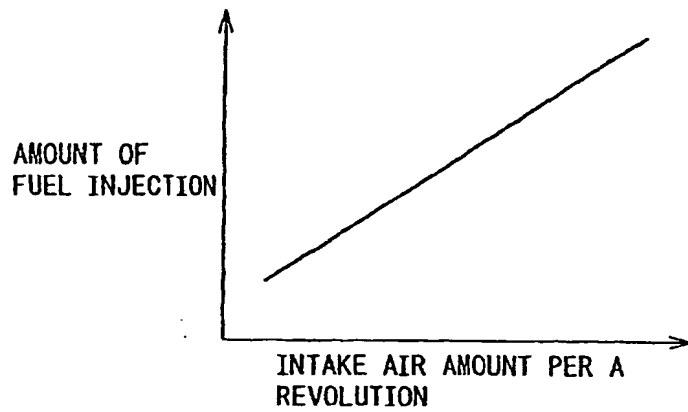


Fig.64


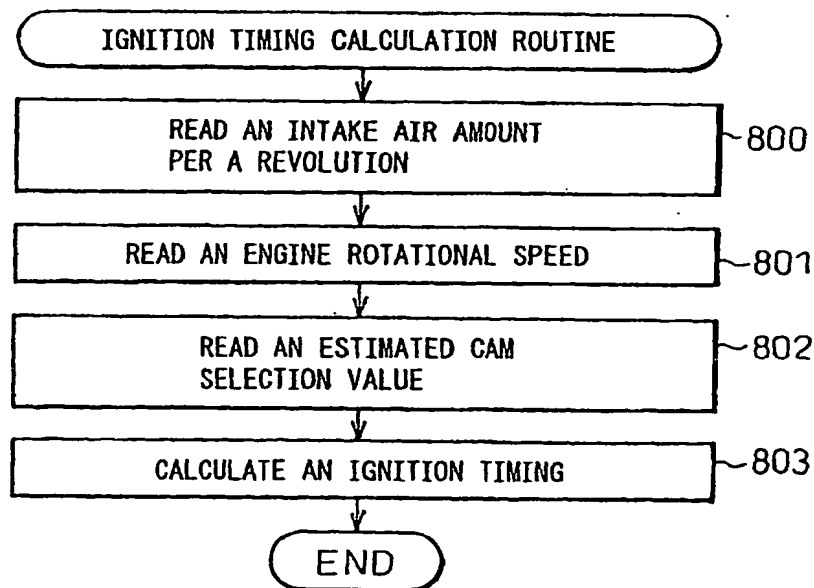


Fig.65

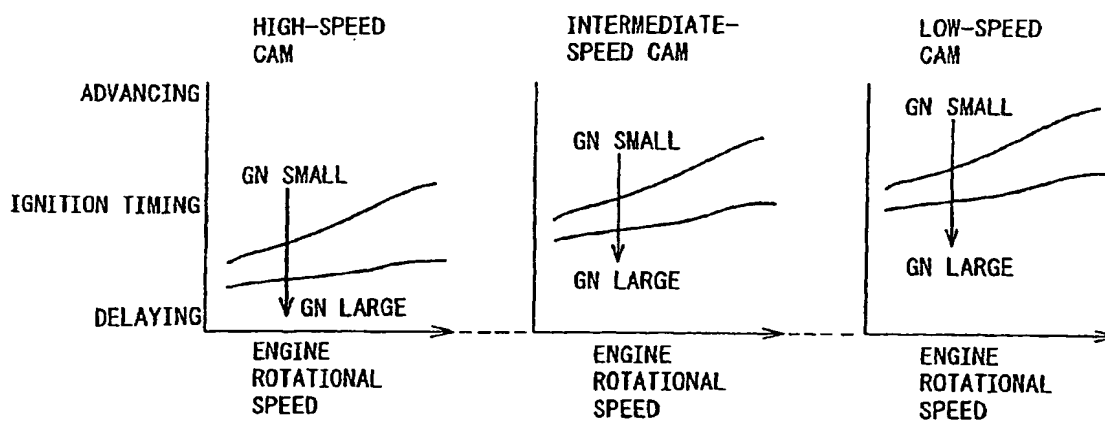

List of Reference Numerals

- 1 - internal combustion engine
- 2 - intake valve
- 3 - exhaust valve
- 4, 5 - cams
- 6, 7 - camshafts
- 8 - combustion chamber in the cylinder
- 9 - device for changing the valve-lifting amount
- 11 - opening/closing timing shifting device
- 18 - intake pipe pressure sensor
- 19 - air flow meter

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/10917

A. CLASSIFICATION OF SUBJECT MATTER

Int.Cl⁷ F02D41/04, F02D45/00, F02P5/15

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl⁷ F02D13/02, F02D41/04, F02D45/00, F02P5/15

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho	1926-1996	Toroku Jitsuyo Shinan Koho	1994-2002
Kokai Jitsuyo Shinan Koho	1971-2002	Jitsuyo Shinan Toroku Koho	1996-2002

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP, 2-291447, A (Toyota Motor Corp.), 03 December, 1990 (03.12.90), Full text (Family: none)	1-10
A	US, 004896642, A1 (Mitsubishi Denki K.K.), 30 January, 1990 (30.01.90), Full text & JP 1-280680 A & DE 003833124 A1	11-19
A	JP, 4-81574, A (Mitsubishi Motors Corp.), 16 March, 1992 (16.03.92), Full text (Family: none)	11-19
A	JP, 10-288067, A (Denso Corp., Toyota Motor Corp.), 27 October, 1998 (27.10.98), Full text (Family: none)	1-19
A	JP, 2000-314318, A (Nissan Motor Co., Ltd.), 14 November, 2000 (14.11.00), Full text (Family: none)	1-19

☒ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to
"A" document defining the general state of the art which is not	understand the principle or theory underlying the invention
considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be
"E" earlier document but published on or after the international filing	considered novel or cannot be considered to involve an inventive
date	step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is	"Y" document of particular relevance; the claimed invention cannot be
cited to establish the publication date of another citation or other	considered to involve an inventive step when the document is
special reason (as specified)	combined with one or more other such documents, such
"O" document referring to an oral disclosure, use, exhibition or other	combination being obvious to a person skilled in the art
means	"&" document member of the same patent family
"P" document published prior to the international filing date but later	
than the priority date claimed	

Date of the actual completion of the international search
18 March, 2002 (18.03.02)Date of mailing of the international search report
26 March, 2002 (26.03.02)Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/10917

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP, 9-209895, A (Toyota Motor Corp.), 12 August, 1997 (12.08.97), Full text (Family: none)	20-31
A	JP, 7-49034, A (Nissan Motor Co., Ltd.), 21 February, 1995 (21.02.95), Full text (Family: none)	32-35

Form PCT/ISA/210 (continuation of second sheet) (July 1998)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.